


100% PRO

2019-2020





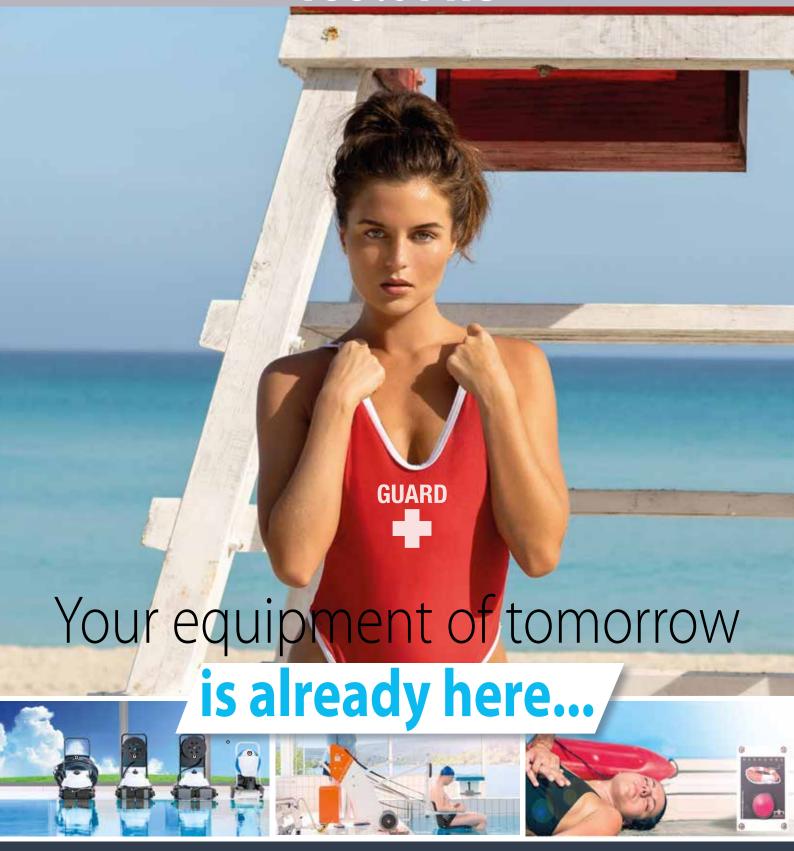







Over 32 years of existence, almost 10 years have passed since Hexagone took a new turn, that of technology and extension of its catalogue in order to offer appropriate, reliable and intelligent equipment for public and collective pools.

Hexagone set the mission: to improve the working conditions of its clients through innovative products, that respect human and the environment, so that **technology is only useful for helping people!**

The equipment of tomorrow is already at Hexagone, with 12 new products for this new mission:

- 1/ To fight against the biofilm at the bottom of the basins and to reduce the chloramines and THM
- 2/ To clean regularly the buffer tank to simplify the emptying
- 3/ To help to suck under a mobile floor with a robot
- 4/ To navigate in a bio pool filled with algae
- 5/ To fight against sediments on gratings and in gutters
- 6/ To improve the life of lifeguards with a 360 ° platform, design and comfortable
- 7/ To provide super-resistant gutter gratings, free of heavy metals and anti-slip
- 8/ To create chlorine in the technical room of the swimming pool rather than transport it on the road
- 9/ To stop the users so that they all take a soapy shower before entering the water
- 10/ To take care of a fast and redundant information diffusion for the pool team in case of problems
- 11/ Challenging energy costs by adding a cover over swimming lines
- 12/ To take the robots out of the water and go clean synthetic lawns

Faithful to our demarche of free demonstrations, Hexagone goes to travel in your centres to meet you and present you the pool of tomorrow, more than ever intelligent, communicative and effective.

Thanks to you, Hexagone is present in more than 70% of French public swimming pools. This honours us and obliges us.

We hope that you will find solutions to your problems in our new catalogue. All of our 75 employees are at your disposal to advise, demonstrate and keep track of your products.

At your service, Your very devoted

President of Hexagone Manufacture, Mabis Group

Your Romagui



Our references














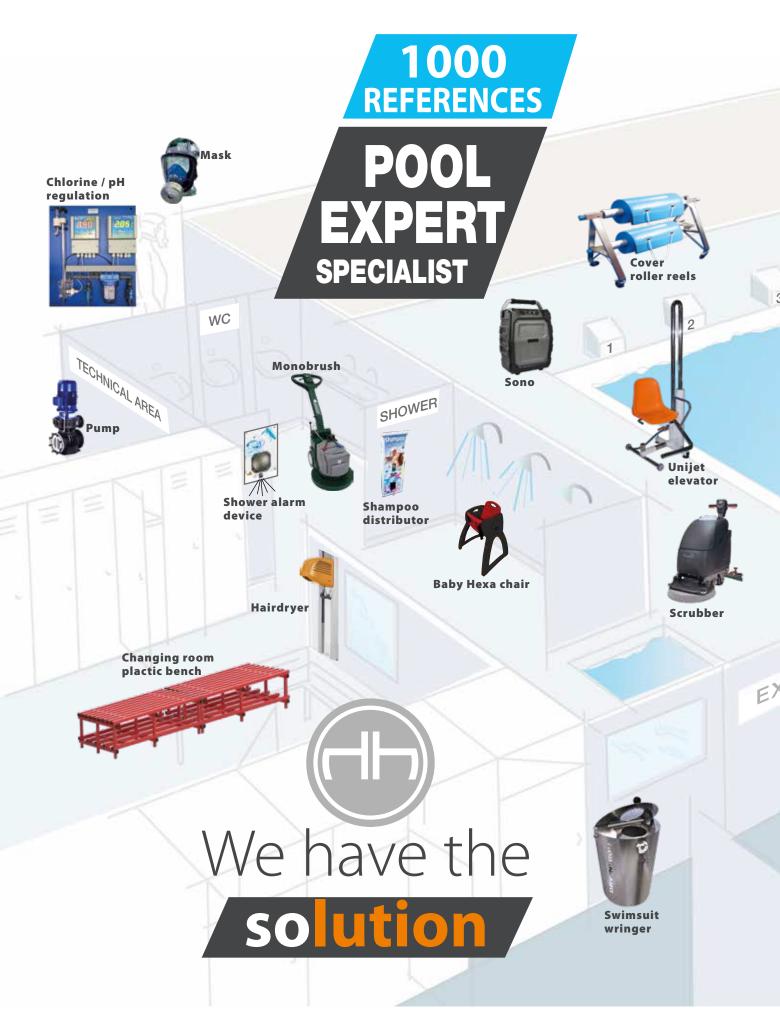



PAGE 8
PAGE 10
PAGE 12
PAGE 14
PAGE 20
PAGE 26

PAGE 32
PAGE 34
PAGE 35
PAGE 36
PAGE 37
PAGE 38
PAGE 39

Intensive use	PAGE 42
Regular use	PAGE 44
Chairs	PAGE 46
Hydraulic	PAGE 48
Hoist	PAGE 50
Motorized	PAGE 51

Lifeguard chairs	PAGE 56
Lifeguard platforms	PAGE 58
Security	PAGE 60
Swimming lanes	PAGE 64
Starting blocks	PAGE 67
Games	PAGE 67

Hexa Sono	PAGE 70
Design Bike	PAGE 72
Design multi-activity	PAGE 74
Sport Bike	PAGE 76
Sport run & jump	PAGE 78
Aquatic Walks X-Treme Power	PAGE 79

Shower, changing rooms, wellness	PAGE 82
Storage - gutter grates - analysis	PAGE 90
Treatment - covering - shelter	PAGE 94



Residential



Semi-pro




Commercial pools



PAGE 12



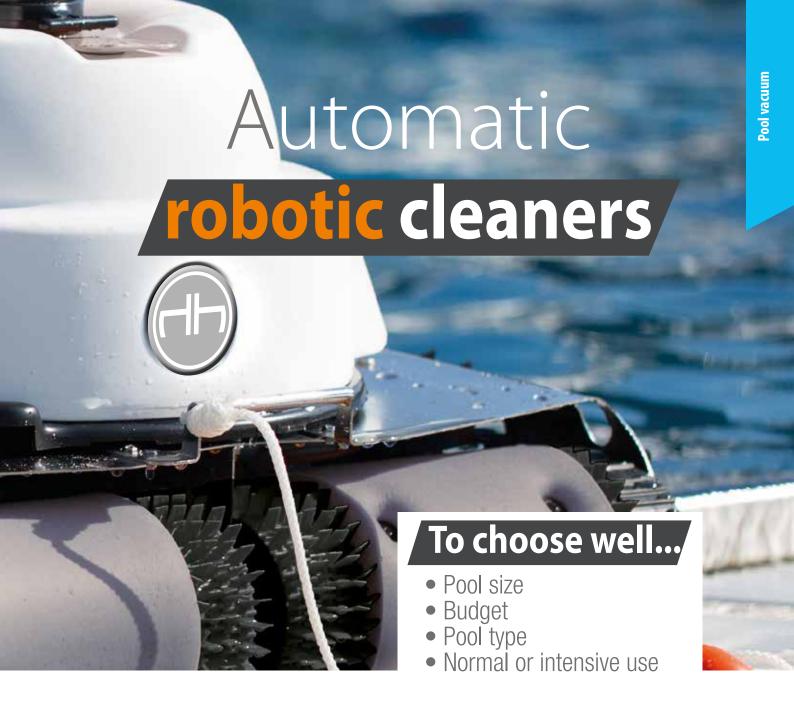

Aquatic Center



Anti-biofilm solution



Natural Pool







Top of the range

5 years warranty*







NEW!




The assurance of effective and precise cleaning via a gyroscope

Fruit of the experience on the market of public swimming pools robots

Short or intensive program cycle, bottom or bottom / walls

Double ultra-filtering large capacity bags

Can be delivered with trolley and remote control



Sophisticated and elegant design

Our designer: Jan Bujak

The new **Crocodile Rock** robot comes from Jan Bujak's design studio, which regularly works with Elon Musk on the hyperloop project or with the Volkswagen group.

His signature now crowns our robot **Crocodile Rock**, with a powerful design, embodying sportiness, dynamism and emotion, for a high-end model.





Technical data

SERIE 1 B

SERIE 3 B

SERIE 5 NEON B

SERIE 8 XD B



Mode
Pool length
Cleaner width
Cleaning speed
Suction power
Weight out of water/ in water
Cable length

Weight out of water/ in v Cable length Trolley Remote control Filtration capacity Power supply Autonomy/ Charge time

Autonomy/ Charge tim Brush type References



Floor
Up to 15 m
40 cm
10 to 18 m/min
23 m³/h
7,5 kg/ 1,5 kg
16 m
Without
Without
3,1 kg
110 v-240 v / 24 vdc

— PVC, option PVA xygps01



Floor and wall
Up to 15 m
40 cm
10 to 18 m/min
23 m³/h
9 kg/ 2 kg
18 m
With
Without
3,1 kg
110 v-240 v / 24 vdc

PVC, option PVA xygps03



Floor and wall
Up to 18 m
40 cm
10 to 18 m/min
23 m³/h
9 kg/ 2 kg
20 m
With
With
3,1 kg
110 v-240 v / 24 vdc

PVC, option PVA xygps05



Up to 18 m
40 cm
10 to 18 m/min
23 m³/h
9 kg/ 2 kg (without battery)
With battery
With
With
3,1 kg
12 Volts
3 h (autonomy) / 6 h (charge)
PVC, option PVA

The warranty is 2 years for parts and work in workshop. (Excludes consumables). Non-contractual photos.

xygps08





The ally for outdoor hotel pools






Smart cleaning with integrated gyro

High filtration fineness, 100 microns

Ability to clean pools with islets

Ultra-light for the user

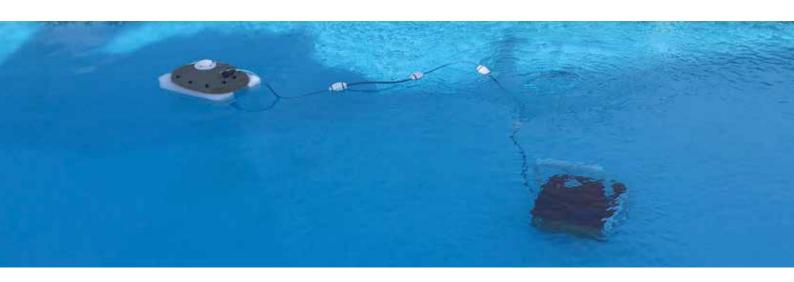

Technical data

SPOT PRO 100 A

SPOT PRO 150 XD

SPOT DUO 200 A



Mode
Pool length
Cleaner width
Cleaning speed
Suction power

Weight out of water/ in water

Cable length
Trolley
Remote control
Filtration capacity
Power supply

Autonomy/ Charge time

Brush type References



Up to 25 m 40 cm 10 to 15 m/min 27 m3/h 9 kg/ 2 kg 30 m With With 3,1 kg

110 v-240 v / 24 vdc

D) (

PVC, option PVA xygpsp100



Floor and wall
Up to 20 m
40 cm
10 to 15 m/min
27 m3/h
9 kg/ 2 kg
With battery
With
With
3,1 kg
12 Volts

3 h (autonomy) / 6 h (charge)

PVC, option PVA xygpsp150



Floor
Up to 50 m
78 cm
10 to 15 m/min
50 m3/h
18 kg/ 4 kg
40 m
With
With
6,2 kg
110 v-240 v / 24 vdc

PVC, option PVA xygpsp200

Commercial pools





The robot with

hard bristles



SCAN TO WATCH THE VIDEO



Brushing function multiplied via rotary brush

Equipment is easy to use via its touch screen

Compact, lightweight and handy robot

Versatility of work for outstanding efficiency

For pools with slope less than 25 degrees





Pool length Cleaner width Cleaning speed Suction power Weight out of water/ in water Cable length Trolley Filtration capacity

IR (detection walls) Power supply References



37 m³/h 14 kg/ 2 kg 30 m (supplied) In stainless steel (supplied) 4 kg of sand

110 v-240 v / 12 vdc xypeps200



12 m/mn 37 m³/h 17 kg/ 2 kg 40 m (supplied), 30 m in option In stainless steel (supplied) 6 kg of sand



FILTERS 75 microns Fine filtration xzpepsf01n02

105 microns

Classic filtration (delivered as standard)

250 microns Filtration for exteriors

1000 microns Filtration for reopen the pool xzpepsf01n01

xzpepsf01n03

xzpepsf01n04

The warranty is 2 years for parts and work and on-site visits. (Excludes consumables). Non-contractual photos.

110 v-240 v / 12 vdc

xypeps300 (Available 09/2019)

Aquatic Center





The best-selling robot





* In public pools






Umbrella filter without touching impurities





camera for mobile bottom optional





Non-contractual photos.

Lateral brush for bottom edge

Professional quality, stainless steel chassis

Optimum coverage and speed of cleaning

Choice of 6 filtration fineness

Floor or floor and walls program

On-site maintenance with Plug & Play technology







Customize your robot page 16.

Technical data

CHRONO MP3 M A

CHRONO MP3 L A

CHRONO MP3 XL A



Pool length Cleaner width Cleaning speed Suction power

Weight out of water/ in water

Filtration capacity IR (detection walls) Power supply

References



Up to 25 m

50 cm

10 to 18 m/min 50 m³/h

22 kg/ 3 kg

3,1 kg 2 or 4

110 v-240 v / 24 vdc

xcmp3m-std



25/33 m

60 cm

10 to 18 m/min

50 m³/h 23 kg/ 3 kg

3,1 kg 2 or 4

110 v-240 v / 24 vdc

xcmp3l-std



50/60 m

75 cm

10 to 18 m/min

50 m³/h

24 kg/ 3 kg

3,1 kg

2 or 4

110 v-240 v / 24 vdc xcmp3xl-std

Configurator





Configurator

AUTO CLEANING MODES



DUO MODE possible









Magellan cross





Hexpresso Ultra fast 10' for 25m 30' for 50m.

Systematic - 45' for 25m

- 1h30' for 50m. xzcmp3e02n03

Classic - 1h15' for 25m - 3h for 50m. xzcmp3e02n01

V-shape

Long - 2h30 for 25m

- 5h for 50m. xzcmp3e02n04

Floor & walls

Very long- 3h30' for 25m
- 6h for 50m.

xzcmp3e02n02

CABLES



25 m

Free-floating reinforced PVC coating xzcmp3c01n02 (for MP3) xzcmp3c02n01 (for MP4)



32 m

Free-floating reinforced PVC coating xzcmp3c01n04 (for MP3) xzcmp3c02n02 (for MP4)



40 m

Free-floating reinforced PVC coating xzcmp3c01n05 (for MP3) xzcmp3c02n03 (for MP4)



50 m

Free-floating reinforced PVC coating xzcmp3c01n06 (for MP3) xzcmp3c02n04 (for MP4)

TROLLEYS



Dispenser With dispenser and 2 forks

xzcmp3k01n01



25-32 m Reel Shared trolley with cable reel xzcmp3k01n02



40-50 m Reel

Shared trolley with cable reel xzcmp3k01n03



Winch trolley

Equipped with gallows with winch xzcmp3k01n04

CAMERA





Special mobile bottom



Camera option

Waterproof camera IP68 with 8 leds





FILTERS



20 microns

Very fine. Algae, funguses, diatom xzcmp3f01n03



1000 microns

For reopen the pool. Leaves, piercings xzcmp3f01n04



75 microns

Fine. Sands, algae xzcmp3f01n07



2000 microns

For reopen the pool. Large debris, stones. xzcmp3f01n08



105 microns

Classic. Sands, hair, plasters xzcmp3f01n01



Leaves plate

1 cm.

fb0002n000





TOP 1

Extra filtration, TOP1 bag. Adaptable to all filter finesses. pb0080n000 + pb0081n000 + qp0025n001 (without filter, contact us)



BRUSHES

PVC

For M xzcmp3d02n03 xzcmp3d02n06 (for walls) For L xzcmp3d01n09 xzcmp3d01n12 (for walls) xzcmp3d02n15 xzcmp3d02n18 (for walls)



Mixed

For M xzcmp3d01n01 xzcmp3d02n04 (for walls) For L xzcmp3d01n07 xzcmp3d02n10 (for walls) For XL xzcmp3d01n13 xzcmp3d02n16 (for walls)



PVA

For M xzcmp3d01n02 xzcmp3d02n05 (for walls) For walls L xzcmp3d02n08 xzcmp3d01n11 (for walls) xzcmp3d02n14 xzcmp3d02n17 (for walls)





ACCESSORIES



Remote power supply xzcmp3e03n03



Re-lift kit M/L/XL

xzcmp3a01n04/5/6



Outdoor cover ka0203n000



Great depth

xzcmp3h01n03



Saltwater

xzcmp3e01n02



Liner M/L/XL

xzcmp3e00n04/5/6

Navigation



Cleaning modes








Fast

Classic

Double covering



Unique covering



Systematic mode

Tape by tape, parallel lines - 45 min for 25 m xzcmp3e02n03 - 1h30 for 50 m

Magellan cross mode

Passage by perpendicular lines - 1h15 for 25 m - 3h for 50 m xzcmp3e02n01

Long

Triple or quadrupled covering



Very long

Total covering



DUO

V-shape mode

Contact us

Moving by V-lines, numerous passages - 2h30 for 25 m - 5h for 50 m xzcmp3e02n04









Floor and walls mode

Moving in perpendicular lines with adjustable wall climbing

- 3h30 for 25 m - 6h for 50 m xzcmp3e02n02

COMBI mode

Possibility to combine 2 cleaning modes automatically to link 1 auto mode and 2 auto mode of your choice.

Robot sensors

Detectors of walls, slopes, sides, virtual walls:



Virtual wall

algorithm





microampere sensor

Speed of movement

360°

Pool cleaner safety management:

Trajectory management control:



Obstacle detection intensity sensor



Straight line management chronomete

Anti-twist of the cable rotation sensor




Pool types

Whatever the shape:























A colour touch

screen interface

Cleaning mode depending on available time

Human / machine touch interface



Touch dashboard






REMOTE CONTROL MENU
Manipulation with the remote control



Visualization of the progression in automatic mode



Robot elements control panel, list of 10 faults, data panel, settings menu

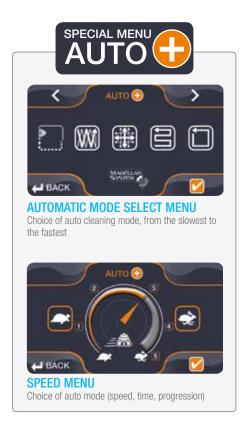





Can a robotic va reduce chem and make wat


ANTIBACTERIAL

Filter the visible from 20 microns

Bandages - hair - leaves...

INSIDE THE ROBOT...





Non-contractual photos.


RESULT: REMOVAL

NOVELTY

cuum cleaner ical intake er healthier?

BIOFILM

ROBOT VIKING

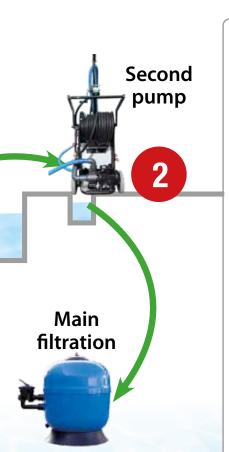

Extract the invisible

up to 0.05 microns Bacteria - microscopic impurities...

THROUGH AN EVACUATION PIPE...



Non-contractual photos.

OF 99.8% BACTERIA





The armed arm of



swimming pool filtration





Institute, Denmark

Weight out of water/ in water

Inside filtration capacity

IR (detection walls)

Power supply References


Sucks and extracts the biofilm at the bottom of 5 cm

Reduces chemical intake

Helps to remove bacteria from the bottom of basin

Significant reduction in chloramine level

The robot becomes the arm of your filtration

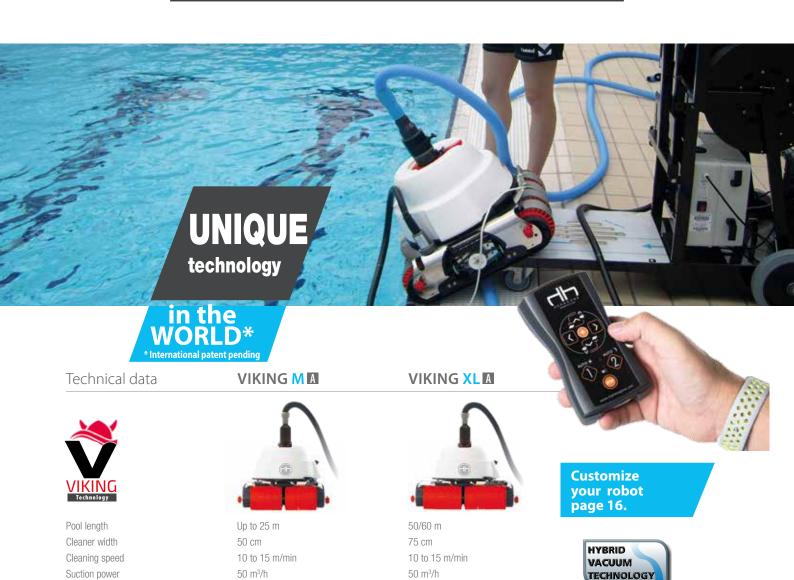

The warranty is 2 years for parts and work and on-site visits. (Excludes consumables). Non-contractual photos.

24 kg/ 3 kg

110 v-240 v / 24 vdc

xcmp3xl-stdvkg

3,1 kg

2 or 4

22 kg/3 kg

110 v-240 v / 24 vdc

xcmp3m-std510vkg

3,1 kg

2 or 4





A robot dedicated to



a balance tank







Permanently stays in a balance tank

Innovative automatic cleaning solution

Much simpler and safer for agents

Real daily cleaning before emptying

Fights against chloramine and sediments

Automatic balance tank cleaner















Pool length
Cleaner width
Cleaning speed
Suction power
Weight out of water/ in water

Cable length

Trolley

References

Filtration capacity

IR (detection walls)
Power supply


8 m/mn 30 m3/h 14 kg/ 2 kg 16 m (supplied) In stainless steel (supplied) External 1 110 v-240 v / 12 vdc xypeps100vkg

Balance tank

40 cm







Technology





LEVEL 1 FILTRATION

PREFILTER

Large impurities at the bottom of the pond (leaves, sand, stones) are trapped thanks to the pre-filter of the robot.







Cleaning for natural pools

3 in 1 funnel filtration system

Perfect for natural pools

Allows filtering of very large quantities of waste

Deep depth cleaning solution













Drum filter for bio pool

Stainless steel 304L or 316L. Dimensions: W.473 x D.693 x H.577 mm. Weight 80 kg. Recommended pressure 5 bar. Contact us

Technical data

BIO-MATIC MA

BIO-MATIC XLA

KIT BIO-MATIC System A



Pool surface Cleaner width Cleaning speed Suction power

Weight out of water/ in water Inside filtration capacity IR (detection walls)

Power supply References



1000 m² 50 cm 10 to 15 m/min

50 m³/h 22 kg/ 3 kg

3,1 kg 2 or 4

110 v-240 v / 24 vdc

Contact us



1500 m² 75 cm

10 to 15 m/min

50 m³/h

24 kg/ 3 kg

3,1 kg 2 or 4

110 v-240 v / 24 vdc

Contact us





Kit Robot pre-filter + Quick Vac' Cyclone + fork with 4 filter-bags (for existing Hexagone robot)

With our 4 specific bags, you can choose the grid of 20, 75, 105, 250, 1000 or 2000 microns.

Delivered with a 5 m hose for water discharge and a

25 m hose for suction.

Other lengths of hose, consult us.

Contact us



Manual brushes for natural pools

Technical data

Lineo XL large depth A

Lineo rotary brush XXL A





Brush size Power supply Telescopic rod Battery charger Autonomy

Weight Brushes

Dimensions (folded WxDxH)

Références



ø 22 cm 24V Li-Ion battery 250 to 500 cm Serial

>1h to 2h

Rotating nylon brush (optional pad)

xlineobb22n000 Delivered with a brush



Width 44 cm 24V Li-Ion battery 250 to 500 cm Serial

>2h to 3h 6 kg

Rotating nylon roller

xlineobs44n000 Delivered with a black roll

Non-contractual photos.



Fits with Lineo

brushes

110V-240V 250 to 500 cm

32,5 kg Triangular brush 85 x 46 x 62 cm z260ftorultra

Hexagone, the largest range of po

RESIDENTIAL POOL VACUUM

Technical data

SERIE 1 B

SERIE 3 B

SERIE 5 B

SERIE 8 B











Normal
60 m ²
40 cm
10 to 18 m/min
23 m³/h
16 m
No
3,1 kg
No
110 v-240 v / 24 vdc
No
7,5 kg/ 1,5 kg
30 cm
8



Normal
60 m ²
40 cm
10 to 18 m/min
23 m³/h
18 m
Yes (supplied)
3,1 kg
No
110 v-240 v / 24 vdc
No
9 kg/ 2 kg
30 cm
8





Normal	
80 m ²	
40 cm	
10 to 18 m/min	
23 m³/h	
With battery	
Yes (supplied)	
3,1 kg	
No	
12 volts battery	
No	
9 kg/ 2 kg	
30 cm	
8	

AQUATIC CENTER POOL VACUUM

Technical data

CHRONO MP3 M A

CHRONO MP3 L

CHRONO MP3 XL A

Technical data







Infra red (detection walls)
Power supply
Camera
Weight out of water / in water
Minimum water depth
Page number



Control of the last of the las
Intensive
300 m²
50 cm
10 to 18 m/min
50 m³/h
25, 32, 40 or 50 m
Stainless steel (4 types)
3,1 kg
2 or 4
110 v-240 v / 24 vdc
Yes (MP4)
22 kg/ 3 kg
40 cm
14
·



- Company of the last of the l
Intensive
495 m²
60 cm
10 to 18 m/min
50 m ³ /h
25, 32, 40 or 50 m
Stainless steel (4 types)
3,1 kg
2 or 4
110 v-240 v / 24 vdc
Yes (MP4)
23 kg/ 3 kg
40 cm
14



Intensive

1250 m²

75 cm

10 to 18 m/min

50 m³/h

25, 32, 40 or 50 m

Stainless steel (4 types)

3,1 kg

2 or 4

110 v-240 v / 24 vdc

Yes (MP4)

24 kg/ 3 kg

40 cm





Use	
Basin area	
Widt	th of the vacuum cleaner
Clea	ining speed
Suct	tion power
Cab	le length
Troll	ey
Filtra	ation capacity
Infra	red (detection walls)
Power supply	
Cam	nera
Weight out of water / in water	
Dep.	th of water mini

The warranty is 2 years for parts and work and on-site visits. (in workshop for Crocodile rock and Squirrel). Excludes consumables. Non-contractual photos.



ols vacuum robots on the market

SEMI-PRO POOL VACUUM

COMMERCIAL POOL VACUUM

SPOT PRO 100 A

SPOT PRO 150 XD A

SPOT DUO 200 A

PEPS 200 A

PEPS 300 A



Intensive

200 m² 40 cm

10 to 15 m/min

27 m³/h 30 m

Yes (supplied)

3,1 kg

110 v-240 v / 24 vdc

No

9 kg/ 2 kg 30 cm

10



Intensive

150 m²

40 cm

10 to 15 m/min

27 m³/h

With battery Yes (supplied)

3,1 kg

12 volts battery

No

9 kg/ 2 kg 30 cm



Intensive

400 m²

78 cm

10 to 15 m/min

50 m³/h

40 m

Yes (supplied)

6,2 kg of sand

110 v-240 v / 24 vdc

No

18 kg/ 4 kg 30 cm



Intensive

250 m²

40 cm

____ 10 m/min

37 m³/h

30 m (supplied)

In stainless steel (supplied)

4 kg of sand

110 v-240 v / 12 vdc

No 14 kg/ 2 kg

15 cm

12



Intensive

400 m²

60 cm

12 m/min

37 m³/h

40 m (supplied), 30 m in option

In stainless steel (supplied)

6 kg of sand

110 v-240 v / 12 vdc

No

17 kg/ 2 kg

15 cm

12

BIOFILM SOLUTION POOL VACUUM

DARK CLEANER B



Ultra filtration

100 m² 40 cm

8 m/min 30 m³/h

In stainless steel (supplied)

External

1 (detection walls) 110 v-240 v / 12 vdc

24

14 kg/ 2 kg 50 cm

VIKING MA



Ultra filtration

350 m² 50 cm

10 to 15 m/min

25, 32, 40 or 50 m Stainless steel (winch trolley)

3,1 kg (inside)

110 v-240 v / 24 vdc

Yes (MP4) 22 kg/ 3 kg

50 cm 22

VIKING XL A



Ultra filtration

800 m²

75 cm

50 m³/h

3,1 kg (inside)

110 v-240 v / 24 vdc

24 kg/ 3 kg



10 to 15 m/min

25, 32, 40 or 50 m

Stainless steel (winch trolley)

Yes (MP4)

50 cm

22

NATURAL POOL VACUUM

BIO-MATIC MA



Biopool

1000 m²

50 cm 10 to 15 m/min

50 m³/h

25, 32, 40 or 50 m

Stainless steel (winch trolley) 3,1 kg (inside)

110 v-240 v / 24 vdc Yes (MP4)

22 kg/ 3 kg 50 cm

28

2 or 4



BIO-MATIC XL A

Biopool

1500 m²

75 cm 10 to 15 m/min

50 m³/h 25, 32, 40 or 50 m

Stainless steel (winch trolley) 3,1 kg (inside)

2 or 4 110 v-240 v / 24 vdc

Yes (MP4) 24 kg/ 3 kg

50 cm 28

The warranty is 2 years for parts and work and on-site visits. (in workshop for Crocodile rock and Squirrel). Excludes consumables. Non-contractual photos.





Boost

THE VIDEO





Manual vacuum on 12V battery

Direct suction into own filter bag

Easy handling with 4 wheels 360°

Ideal for small pools, sucks from 15 cm of water*

Delivered with a transport trolley



Technical data

*Quick Vac' Padding pool A

Ouick Vac' classic A

Ouick Vac' XL B



Suction power Trolleys/ Chassis Cable length Weight out of water Pump Filtration (microns) Filtration capacity Autonomy Power supply Minimum water depth References battery/Power supply



40 cm 40m³/h

Painted aluminium/UNBS

14 m 5 kg 250 W

75, 100, 250, 1000 µ

2kg 3h

12 V battery/ Power supply

xz490fv003-d-000b / xz490fv003-d-000s



40m³/h

Painted aluminium/UNBS 14 m

5 kg 250 W

75, 100, 250, 1000 µ

4 kg 3h

12 V battery/ Power supply

xz490fv002-d-000b / xz490fv002-d-000s

110 cm

110 cm 40m³/h

Painted aluminium/UNBS

21 m 7 kg 250 W

75, 100, 250, 1000 µ

6 kg 3h

12 V battery/ Power supply

xz490fv003000-d-000b/ xz490fv003000-d-000s

The warranty is 2 years for parts and work in workshop. (Excludes filters and battery). Non-contractual photos.

Manual



The power

of a cyclone













12V rechargeable battery

z160hplwrxl

z124ffairlock / z124ffairlock96cm

Α

Technical data Quick Vac' Cyclone Quick Vac' pump Fairlock vacuum head A Quick Vac' spa turbo XL B **NEW! NEW!** Quick Cyclone Cleaning up to 300m² L.45 x P.112 x H.86 cm 48 cm/ 96 cm 40 cm Dimensions from 0.5 to 1 HP 27m³/h 15m³/h Suction power Materials Thermoplastic / polycarbonate Plastic ABS plastic Cable length 15 m Floating hose (in option) 34 kg Weight out of water 35 kg 3,5 kg/7 kg 1,4 kg 663 W 250 W Contact us Filtration (microns) Pleated cartridge 50 or 100 μ Filtration capacity 3.7m² filtering surface About 1 kg of sand 2h Autonomy Minimum water depth 15 cm 21 cm

230 V

Contact us

Power supply

References

220 - 240 V

z289h200400hex






Pools edge

Clean

inaccessible places









line Telescopic handle from 1.50m to 2.50m

Special air/ water line!

Battery included

Battery charger for Lineo M A

Charger 220V / 12V DC z702fms1580-2

Tiled surface



















Accessories, brushes, pad optional, contact us

Non-contractual photos.

Head adjustable

Technical data

Lineo M complete A

Brush Lineo magic sponge A

Water line cleaning gel A

Hexagom, magic sponge C



Brush diameter
Power supply
Telescopic handle
Battery charger
Power/ Autonomy
Weight

Brushing/ Cleaning Dimensions (WxDxH folded) References

ø 15 cm 12V marine battery 150 to 250 cm Serial 40 W / 1h30' 2,5 kg

Pad / nylon brush rotating at 70° 17 x 112 x 15 cm xlineo1200n000



HEXAGOM Special Lineo is a magic sponge of HIGH DENSITY for water line on motorized brush. HEXAGONE exclusivity. It takes a lot less chemicals. Test it, you will be amazed!

A GOM alone z114fgomme
A Support PAD z114fpgxlrdisk



Can 1 kg z246f783000010

Can 5 kg z246f783000050

Can 10 kg z246f783000100

Can 25 kg z246f783000250



HEXAGOM, the new great multisurface magic eraser. Effectively clean stains and encrusted dirt on the walls, pool bottom and water line. High density foam compared to most competitors.

Brush head XL z114fpgxl20

Gom XL z114fpgxlr60

Gom L z188f250.100.100



Hexagun, chlorine gun

Flexi pro black **F**

2 products cleaning station

Cleaning trolley TM 2815W



Chlorine HEXAGUN is an easy and effective system for cleaning and disinfection. It can be used everywhere and on all surfaces that can withstand water.

Hexagun 70 PPM z115fsws-sp-70
Hexagun 250 PPM z115fsws-sp-250

F Pack 8 tablets z115fswst-01-08



Expandable watering hose, ø22 mm, anti-twisting.

F 15 m z188f475.500.015 F 30 m z188f475.500.030



Ideal for daily cleaning of floors and surfaces. Easy to install, connects directly to a faucet, works without electricity. Allows efficient mixing thanks to 14 colour calibrated nozzles.

Wall station z237fcep2150apa00000

F Trolley for proposed model z237flb99.chm.sb10

Other models, contact us



Clean water bucket 28 liters. Dirty water bucket 15 liters. Dimensions: H.82 x W.41 x D.125 cm.

z236f629196

Other models, contact us

Ideal for cleaning floors in pools











Technical data

Hexa brush F

Monobrush F

Compact TGB1840 F

Hexa matic TGB3045 F

Air/water vacuum WV370 F

Scrubbers

Brushes option z236f606108

Working width
Power supply
Power/ Cleaning
Battery charger/ autonomy
Weight
Area performance
Brushing
Water tanks
References

ø 35 cm 220-240 V / 50-60 Hz -/ 150 rounds/min

18,5 kg 1100 m²/h Nylon pad or brush 10 L z236f704490

Without brushes

ø 40 cm 12 V

250 W/ 150 rounds/min. Included/ 50 min.

27 kg 1400 m²/h Nylon pad or brush

z275h27-400-40601244



24 V 400 W/ 150 rounds/min. Included/ 35 - 45 min. 40 kg 1400 m²/h Nylon pad or brush 18/ 18 L z236f903966



24 V 400 W/ 100 rounds/min. Included/ 2h. 90 kg 1600 m²/h Nylon pad or brush 30/ 30 L

z236f903608



Weight 7.1 kg.
Power 1200 W.
Air volume 40 liters / second.
Clean water bucket 9L.
Dimensions:
35,5 x 35,5 x 51 cm

z236f838129



Technical data

Duplex 340 steam

Duplex 420 steam

Duplex turbo compact

Autonomy 1h charge 3h30



Steam rotobrushes

Brushes width
Power supply
Power / brushing speed
Weight
Surface yield
Brushes
Detergent / Recovery Tan

Brushes
Detergent / Recovery Tank
Dimensions (WxDxH)
References

280 mm 220-240 V / 50-60 Hz 1000 W/ 650-750 rpm 27 kg 180 m²/h 2 brushes ø 10 cm nylon

z236f340875045

4,2/ 2,8 L 34 x 43 x 24 cm (excluding handle) 350 mm 220-240 V / 50-60 Hz 1000 W/ 650-750 rpm

350 mm 220-240 V / 50-60 Hz 1000 W/ 650-750 rpm 27 kg 180 m²/h 2 brushes ø 10 cm nylon 6/ 3,5 L

42 x 43 x 24 cm (excluding handle) z236f420875045

320 mm Lithium battery 36 V 50-60 Hz 350 W/ 500 rpm

350 W/ 500 rpm 15 kg (empty) 1500 m² 2 brushes Ø 10 cm nylon 4/ 6 L 41 x 49 x 112 cm (with handle

41 x 49 x 112 cm (with handle) z236f381303601

Roller brushes optional

Several models, consult us

A maintenance contract is possible when purchasing equipment. Non-contractual photos.



Intensive use




Regular use



Chairs



PAGE 46-47

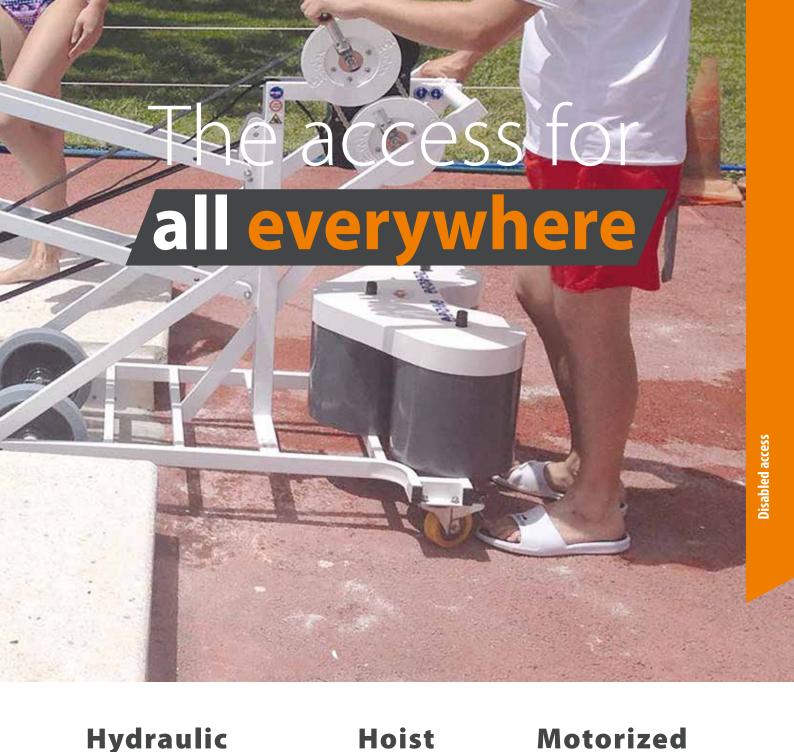

Hydraulic

PAGE 48 and 51 **wijet**





PAGE 47 and 51

Mobile





Accessible



















Simplified pools disabled access



No engine, immediate availability

Pantograph system for perfect security

Complies with standard No.2006/42/CE







Mobile



INTENSIVE

Up to 136 kg

365 kg

Technical data

Unikart Design manual 300 A

Unikart Design motorized 300 XD A

Max lifting load
Weight with counterweight
Power supply
Rear wheels
Front wheels
Dimensions (WxDxH)
Trolley/ Seat
System
The lowest seat position

References

Up to 136 kg
365 kg
No
Swivel braked
Solid wheels
80 x 120 x 170 cm
Painted stainless steel/ Polypropylene
Pantograph (double winch)
90 cm
xuni310n000

24V battery Swivel braked Solid wheels 80 x 120 x 170 cm Painted stainless steel/ Polypropylene Pantograph (motorized actuator) 75 cm xunim31n000



OISABLES

Tetraplegia harness option A
Fasteners for head, thorax, wrists, hips
qqk001n000













Non-contractual photos.



UNIKART actuator via **24V POWER**





Access for all, without installation





Technical data

Unikart Classic Manual A

Unikart Classic Motorized XD A

Unikart Classic Motorized with plug



Mobile

Max lifting load

Weight with counterweight

Power supply

Rear wheels

Front wheels

Dimensions (WxDxH)

Trolley/ Seat

System

The lowest seat position

Warranty References



Up to 136 kg

260 kg

Swivel braked

Solid wheels 80 x 120 x 170 cm

Painted stainless steel/ Polypropylene

Pantograph (double winch)

80 cm

2 years

xunin008



Up to 136 kg

260 kg

24V battery

Swivel braked

Solid wheels

80 x 120 x 170 cm

Painted stainless steel/ Polypropylene

Pantograph (motorized actuator)

65 cm

2 years

xunimpn000



Up to 136 kg

260 kg

110 v-240 v / 24 vdc

Swivel braked

Solid wheels

80 x 120 x 170 cm

Painted stainless steel/ Polypropylene

Pantograph (motorized actuator)

2 years

xunimpn000s







A product for

every ne

Technical data

Wheelchair Unikart 50 D

Wheelchair Unikart 100 D

Wheelchair Unikart 200 F

PRM wall panic button A

Perfect for WC PRM



Use

Max lifting load

Weight

Power supply

Rear wheels

Front wheels

Dimensions (WxDxH)

Structure / Seat

References

Occasional Up to 130 kg

25 kg

None

Inflatables

100 x 72,3 x 110 cm

Stainless steel / rigid shell xuni050n000



Occasional Up to 100 kg

9 kg

None

Inflatables

97 x 93 x 93 cm

Stainless steel / polyester fabric

xuni100n000

Non-contractual photos.



Regular Up to 130 kg

14 kg

None Braked

Solid

126 x 67 x 40 cm

Aluminum / Foam xuni200n000



3.2 V battery power supply. IP 65 protection. Range 150 m. Waterproof. Autonomy 18 months. Dimensions:

100 x 65 x 40 mm.

egs002n001

Motorized descent design

Mobile

Function Max lifting load

Weight

Power supply

Rear wheels

Front wheels

Dimensions (WxDxH)

Trolley/ Seat

System Seat course

References

125 x 64 x 151 cm Aluminum/ stainless steel

Up to 136 kg

2 batteries 2x18A

140 kg

Motorized 112 cm z189fi-swim



Self-propelled / Motorized descent

Up to 145 kg

260 kg

24V battery

70 x 70 x 170 cm

Stainless steel

Motorized 150 cm

z136fpp(01t)



Motorized rotation and descent

Up to 136 kg

457 kg

24V battery

72 x 249 x 168 cm

Aluminum/ stainless steel / rotomolded


Motorized

138 cm

z797f202-0000eu

Spa version page 89

AUTONOMOUS!

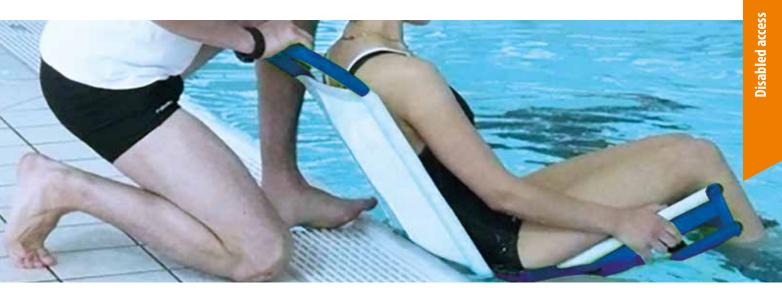

Technical data

Bathing wheelchair

Wheelchair Uniblue

Shower wheelchair **F**

Cover for Unikart C

Wheelchair



Use Max lifting load Weight

Power supply Rear wheels

Front wheels Dimensions (WxDxH) Structure / Seat References

Regular Up to 113 kg 27 kg

None Inflatable ø41 cm

107 x 152 x 127 cm Aluminum - Stainless steel/ Fabric

z350fwaterwheels



Regular Up to 130 kg 22 kg

None 2 large

2 small 71 x 95 x 97 cm

Synthetic z842f570800



Intensive Up to 150 kg shower 20 kg and WC!

None 2

67 x 82 x 105 cm 100% thermoplastic z200f715025



Dimensions (WxDxH): 67 x 70 x 118 cm

ka0292n000





Autonomous






SCAN TO WATCH THE VIDEO









The seat rotates 180° on its axis

Unijet model approved by Apave

Works with water force in piston

Ideal for infinity pool

Complies with legal obligation No 2006/42/CE







OISABLED







Fixed



Technical data

Direction and degree of rotation

Max lifting load Weight

Minimum pressure

Power supply Structure / Seat

Dimensions (WxDxH)

Seat course Pool depth

Fixation References

References

Removable footrest option A

Unijet elevator A

Right 180°

Up to 120 kg 55 kg

3 bars minimum (city water)

Hydraulic

316L painted stainless steel / Rigid shell

70 x 70 x 170 cm 120 cm

Minimum 1m

Coring (chemical anchor provided)

xujetn001

kj0015n000

Unijet elevator A

Left 150°

Up to 120 kg

55 kg

3 bars minimum (city water)

Hydraulic

316L painted stainless steel / Rigid shell

70 x 70 x 170 cm

120 cm

Minimum 1m

Coring (chemical anchor provided)

xujettppn001

kj0022n000











Non-contractual photos.



UNIFIX with motorized actuator **AUTONOMOUS**



For swimming pool





and Spa

Technical data

Manual Unifix D

Motorized Unifix XD

Autonomous Unifix F



Fixed

Max lifting load

Weight

Power supply

Dimensions (WxDxH)

Trolley/ Seat

System

Seat course References

References

References



Regular

Up to 150 kg

50 kg

137 x 30 x 141 cm

Galvanized steel/ hammock or seat

Manual

130 cm


Attachment plate z190fph01-3

Gallows alone

Coring

Gallows alone z190fha02-1

Hammock optional



NEW!

z190fph01-2

Intensive Up to 150 kg

60 kg

2 batteries

132 x 30 x 152,5 cm

Galvanized steel/ hammock or seat

Motorized

140 cm

Attachment plate z190fpv01-3

Gallows alone Coring

z190fpv01-2

150

Gallows alone z190fha02-1

Hammock optional



Autonomous Up to 136 kg

60 kg

24 volts battery

211 x 47 x 140 cm

Aluminum/ stainless steel / rotomolded

Electric actuator

122 cm

z797f310-0000eu

Complete

Spa version P.89

z797f310-0000ceu Bia heiaht

Technical data

Fixed

Use

Weight Power supply

Materials

References

Max lifting load

Dimensions (WxDxH)

Autonomous elevator

Autonomous platform

Stainless steel staircase



Up to 120 kg

Hydraulic

77 x 103 x 289 cm Stainless steel Hydraulic

Contact us



Autonomous Up to 150 kg

Hydraulic

Stainless steel 316L

Hydraulic

Contact us



Battery

Stainless steel

Contact us

System 117 cm Seat course

Hexagone, the largest range of disabl

Technical data

Unikart Classic Manual A

Unikart Classic Motorized XD A

Unikart Classic Motorized with plug A

Unikart Design manual 300 A



Max lifting load







136 kg

260 kg (with counterweight)

Swivel braked

Solid wheels

Painted stainless steel

Polypropylene

Pantograph (double winch)

Unijet elevator A

80 cm

None

80 x 120 x 170 cm

Regular

Intensive 136 kg

260 kg (with counterweight)

Swivel braked

Solid wheels

Painted stainless steel

Polypropylene

Pantograph (motorized actuator)

55 cm

24V battery

80 x 120 x 170 cm



136 kg

260 kg (with counterweight)

Swivel braked

Solid wheels

Painted stainless steel

Polypropylene

Pantograph (motorized actuator)

55 cm

110 v-240 v / 24 vdc

80 x 120 x 170 cm

FIXED DISABLED ACCESS



Regular

136 kg

365 kg (with counterweight)

Swivel braked

Solid wheels

Painted stainless steel

Polypropylene

Pantograph (double winch)

90 cm

None

80 x 120 x 170 cm

42

Technical data





Use
Max lifting load
Weight
Rear wheels
Front wheels
Structure
Seat
System
Seat course
Power supply
Dimensions (W x D x H)
D



Autonomous 120 kg

316L painted stainless steel Rigid shell Hydraulic 120 cm

3 bars minimum (city water) 70 x 70 x 170 cm

48







150 kg

Galvanized steel Hammock or seat

Manual 130 cm None

137 x 30 x 141 cm 50

Motorized Unifix XD





ntensive
150 kg
60 kg
Galvanized steel
Hammock or seat
Motorized
140 cm
2 batteries

132 x 30 x 152,5 cm

50



Autonomous

36	kg
60 I	кg

Aluminium/ Galvanized steel

Rotomolded

Electric actuator

122 cm

24V battery 211 x 47 x 140 cm

51

The warranty is 2 years for parts and work and on-site visits. Excludes consumables. Non-contractual photos.

ed access equipment on the market

MOBILE DISABLED ACCESS

Unikart Design motorized 300 XD A

Unikart Swim D



	ш	i Ki

365 kg (with counterweight)

Swivel braked

Solid wheels

Painted stainless steel

Polypropylene

Pantograph (motorized actuator)

65 cm

24V battery

80 x 120 x 170 cm



Intensive

136 kg

140 kg

Aluminum/ stainless steel

Motorized

62 cm

2 batteries 2x18A 125 x 64 x 151 cm

Unikart Pool lift D





Unikart Pal lift 360° D



Intensive

145 kg

260 kg

Stainless steel

Motorized

90 cm

24V battery

70 x 70 x 170 cm



Autonomous

136 kg

457 kg

Aluminum/ stainless steel

Rotomolded

Motorized

79,3 cm 24V battery

72 x 249 x 168 cm

47

CHAIRS FOR POOL ACCESS, SHOWER, SWIMMING

Wheelchair Unikart 50 D

Wheelchair Unikart 100 D

Wheelchair Unikart 200 F

Wheelchair Uniblue **F**

Shower wheelchair **F**

Bathing wheelchair



Occasional

130 kg

25 kg Inflatables

Inox marine

100 x 72,3 x 110 cm 46

Occasional 100 kg 9 kg Inflatables

Inox marine

97 x 93 x 93 cm 46



Regular

130 kg 14 kg Braked

Foam

126 x 67 x 40 cm



Solid Aluminium

46



Regular

130 kg 22 kg 2 large 2 small Synthetic Synthetic

71 x 95 x 97 cm



Intensive

150 kg 20 kg

100% thermoplastic

67 x 82 x 105 cm

47



Regular

113 kg 27 kg

Inflatables ø41 cm

Aluminium-Stainless steel

107 x 152 x 127 cm

The warranty is 2 years for parts and work and on-site visits. Excludes consumables. Non-contractual photos.

47



Chairs



Platforms



Security





Swimming lanes Starting blocks **Games**








PAGE 67

PAGE 67

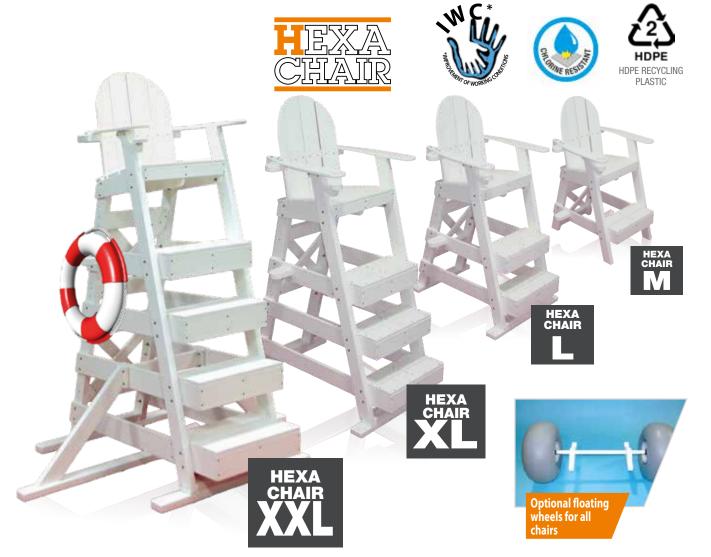

A comfortably seated lifeguard

is happy



Official chair of the American rescuers

Robust with double anti-slip step

Ideal for back, comfortable seat

Parasol and drink holder

4 available sizes

Premium Chairs

Weight Seat height Dimensions (WxDxH)

Material References



35 kg 80 cm 74 x 84 x 140 cm

74 x 84 x 140 cm Recycled polypropylene z093flg505w



50 kg 100 cm 76 x 104 x 155 cm Recycled polypropylene z093flg510w



70 kg 127 cm 76 x 109 x 180 cm Recycled polypropylene z093flg515w



86 kg 152 cm 168 x 125 x 210 cm Recycled polypropylene z093flg517w



Technical data

4-Steps Aluminum Chair

5-Steps Aluminum Chair

6-Steps Aluminum Chair



Optima Chairs

Weight Seat height Seat

Material References



15 kg 2 m PVC Aluminium z569h505-4



2,18 m PVC Aluminium z569h505-5



25 kg 2,36 m PVC Aluminium z569f505 Lifeguard parasol F
• Special 100% acrylic fabric.
• Ø 180 cm, height 140 cm
• Aluminum handle Ø 40 mm
F Without logo
z241f90/10d180-11
F With Hexagone's logo
z241h90/10d180-11-n001



Lifeguard

The new surveillance towe

MALIBU



2 umbrella














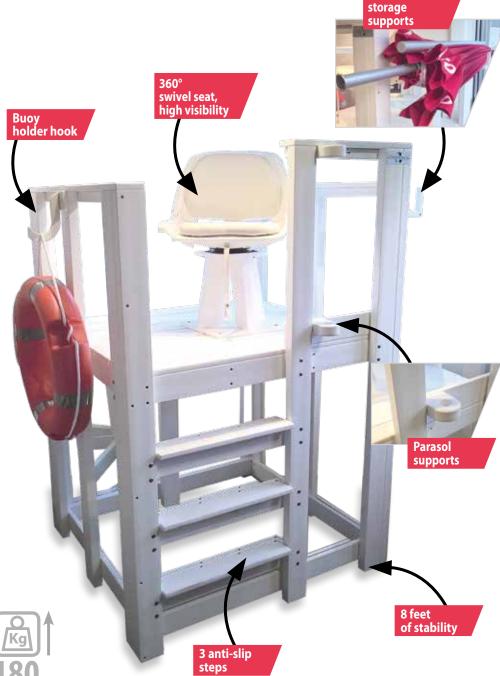

For aqua park, beach, camping, multi pools


Robust, made of recycled plastic

Can be used sitting or standing

Swivel chair with 360° viewing

Holders for parasol, bottle and buoy



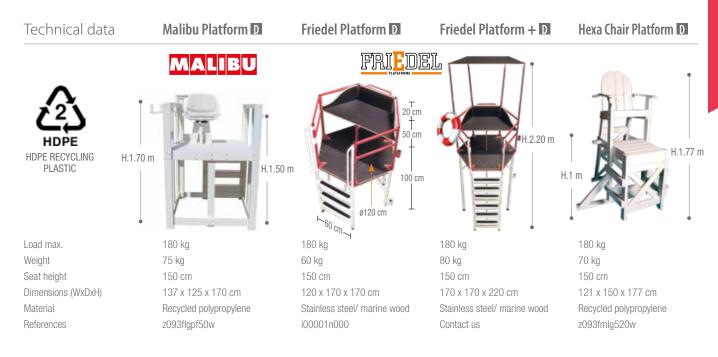

Internal communication system





A «secu-relay» radio kit for an emergency warning throughout the establishment, between you and the users.



Radio panic button



tion system

Configure your alert system on page 62.

Wireless alert communication system

Button IP65 or anti-panic radio control IP68

Reception box with light and sound signal

Easy and fast installation

Protected by international patent

*Information and communication system exclusively. Cannot replace alarms or any other means of surveillance.





Technical data

User **buttons**

Power supply Protection Range Waterproof Autonomy

Dimensions

References

Technical data

Pool Team Buttons

Power supply Protection Range Waterproof Autonomy Dimensions References

Technical data

Central reception box

Power supply Protection Range Waterproof Optional power supply Dimensions

Reference

Standard wall panic button A



3.2 V battery IP 65

150 m

Yes

18 months, 1 / 2AA lithium battery, 3.6V

100 x 65 x 40 mm egs002n001



Ideal for 3.2 V battery unsupervised IP 65 zones

150 m Yes

18 months, 1 / 2AA lithium battery, 3.6V

Special sauna panic button A

100 x 65 x 40 mm

Inside button + outside button + egs005n001 egs004n000

Panic button with announcement A

Fixed for lifeguards, cashiers

3.2 V battery IP 65 150 m

18 months, 1 / 2AA lithium battery, 3.6V

100 x 65 x 40 mm egs003n001

Multi-zone radio control A



Mobile for cleaners, technicians

Withstands up to 110°!

3.2 V battery IP 68 150 m

18 months, 1 / 2AA lithium battery, 3.6V

118 x 68 x 37 mm egs001n000

Spartel LED box with speaker A



220 V socket IP 66

150 m Yes

Solar panels

254 x 180 x 90 mm eks001n000

Non-contractual photos.

button area

Spartel signal repeater A



Passes through walls!

220 V socket IP 66 100 m Yes

180 x 94 x 60 cm

eks005n000 (simple) - eks006n000 (passing through walls) Α

61


Where to install the SPARTEL

	EXAMPLES OF	POSSIBLE LOCATIONS	POOL 1 (principal)	POOL 2 (padding pool)	POOL 3 (Outside)
	EMERGENCY USE	R SITUATION	ZONE 1	ZONE 2	ZONE 3
tton		PANIC button for SAUNA To warn in a sauna or steam room unsupervised during a malaise			
9		PANIC button during FALL To warn at the edge of the pool while slipping or falling			
nt PANIC	6	PANIC button for PRMs To warn at the edge of the pool during a PRM access problem	Ch.	——————————————————————————————————————	
Clie	2	PANIC button while ISOLATION To warn when a person is in an unattended, isolated area			
	EMERGENCY SITUA	TION FOR SWIMMING POOL TEAM	ZONE 1	ZONE 2	ZONE 3
Hon		RESCUE ALERT To warn at the edge of the pool during a rescue procedure	persoi	ith malized cement	
RT but		INCIVILITY ALERT To warn about impolite behavior and ask for help			
ff ALE	The Part of the Pa	CASH DESK ALERT To warn at the cash desk or at the reception during the attack			
Staf		TECHNICAL ALERT To warn in the technical room in case of fall or intoxication			
	CENTRAL SPEAKI	ER & ZONE DISPLAY	ZONE 1	ZONE 2	ZONE 3
	5 .†	1 light and sound reception box to install where you want to be warned. (The box displays the number of the panic button that has just been triggered and emits sounds to warn the entire establishment).	(1)		

secu-relay system?



CLOAKROOM 1	CLOAKROOM 2	CASH DESK	SAUNA WELLNESS	TECHNICAL AREA	OFFICE
ZONE 4	ZONE 5	ZONE 6	ZONE 7	ZONE 8	ZONE 9
—					
ZONE 4	ZONE 5	ZONE 6	ZONE 7	ZONE 8	ZONE 9
Wi person annound	alized				Cib 1 2 2 3 2 4 3 8
		perso	lith nalized ocement		The state of the s
ZONE 4	ZONE 5	ZONE 6	ZONE 7	ZONE 8	ZONE 9
		[5.]			9:

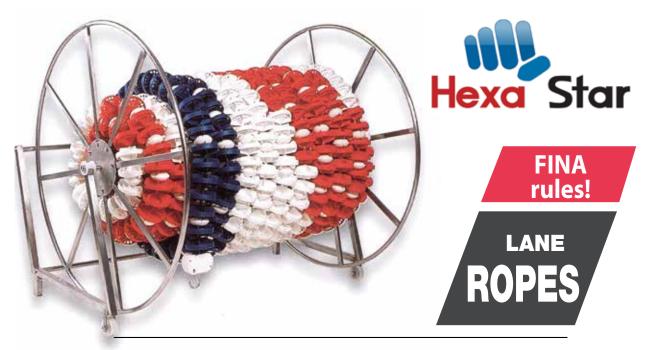

5 colours: blue, red, white, green and yellow


3 diameters of asymmetric disks in PP

Lanes of separation, training or competition

Mounted on plastic coated stainless steel cable AISI316, ø 6 mm

High resistance to chemical agents & weathering

















Disc diameter

Line length

Floats

Colours

Material

Cable

References 25 m

References 50 m



25 and 50 m

In HDPE (7 per meter)

Blue, red, yellow white, green

Polypropylene

Stainless steel ø 6 mm (plastic coated)

D z113fgr.31-25mstd

D z113fgr.31-50mstd



25 and 50 m

In HDPE (6 per meter)

Blue, red, yellow white, green

Polypropylene

Stainless steel ø 6 mm (plastic coated)

D z113fgr.15-25m-std

D z113fgr.15-50m-std



ø 150 mm

25 and 50 m

In HDPE (6 per meter)

Blue, red, yellow white, green

Polypropylene

Stainless steel ø 6 mm (plastic coated)

D z113fgr.24-25m-std

D z113fgr.24-50m-std



Hexa Star

Equipement



Lane storage rolling reels **B**

Stainless steel. Casters with brake. L. 1.30m (4 lines 25m or 2 lines 50m). Hexastar M or L z115fgr9

L. 1,50m (4 lines 25m or 2 lines 50m).

Hexastar XL

z115fgr23



Storage bag

Swimming lane ropes storage bag.

z354f3300093614



Swim lane caddy **F**

Ideal for the sharp pool edge, ensuring safe removal of swimming lanes.

z197f10111021



Swimming lap counter C

Helps swimmers count lengths for competitions. Stainless steel frame. Tables with two-colour numbers are easy to use.


z113fgr.38

Pools



Learning

Aquatic cage 🖪



Marine quality painted aluminum. Various models are available.

E 1,5 x 1,5 m z569f5530 F 2 x 2 m

z569f606

Reinforced belt



Belt of 4 or 5 floats. Stainless steel buckle.

F 4 floats z569f6924

F 5 floats z569f6925 Swim board F



Dimensions: L.40 x D.28 cm.

Thickness 4 cm.

F Without handholds

z569f6940

F With handholds z569f6949

Pool Noodles F



8 cm. For baby, aqua gym, learning, relaxation. Lot of 10.

F Round

z354f72411

F Square z354f7240

Pull-buoy 13

Baby floating mats with holes

Swim Paddles **E**

20 x 13 cm. The pair.

Junior Paddle

Senior Paddle

z569f1995





Turtle Pack for teaching kids to swim

30 kg. Do not protect against drowning. EVA foam shell and neoprene vest. 31 x 25 x 12 cm. Weight 860 gr. Complies with EN71 1/2/3 and EN13138 safety standards. Contact us



140 mm thick. A figure-eight form. Antimicrobial, antibacterial.

z569f4291



Foam with a density of 40 kg/m³.

100 x 50 x 1,5 cm z354f7160 200 x 100 x 4,5 cm z354f7081

z569f1996 Non-contractual photos.

Flat training paddle with elastic bands.

Water games

Water Volleyball A

Floating basketball hoop A

Basketball net A

Water Polo Cage



Aluminum. Width 400 cm. z297f96008-1



Stainless steel. Fixed. z297f96007-1



Made of stainless PVC. With anchor. z297f96007-2



Stainless steel.
Dimensions: 180 x 90 x 100 cm.
z297f96012

Water slides

Optima Water Slide **F**

Water Slide "Elephant"

Compact Water Slide

Water Slide "Rainbow"



Fiberglass.
Dimensions: 233 x 80 x 55 cm.
Weight: contact us.
z297f96056



Fiberglass and 316Ti stainless steel.

Dimensions: 220 x 100 x 125 cm.

Weight: about 160 kg.

z252hsldssdmb



Fiberglass and 316Ti stainless steel. Dimensions: 80 x 170 x 230 cm. Perfect for limited space (130 cm). z252hsld55cmp



Fiberglass and 316Ti stainless steel. Dimensions: 250 x 65 x 130 cm. Weight: about 140 kg. z252hsldfgrnb

Starting blocks

Complies with FINA standards. Supports a weight up to 500 kg.

Low starting block Nautilus **E**

Low starting block Nassau

Starting block with step

Basic low starting block



Starting block with adjustable Fast-Jump system, made of AlSl316 stainless steel painted in cream colour and 50×70 cm anti-slip surface in PE-HD. Base 33×33 cm z113fgr.100




Starting block with adjustable Fast-Jump system, made of AlSl316 stainless steel painted in cream colour and 50×70 cm anti-slip surface in PE-HD.

Base 24×24 cm z113fgr.110



Electropolished AlSI316 stainless steel. Anti-slip platform. Height 70 cm. Adjustable backstroke starting handle. z113fgr.25



Electropolished AISI316 stainless steel. Anti-slip platform. Height 40 cm. Fixed backstroke starting handle. z113fgr.26



Hexa Sono



PAGE 70

Design Bike



Design multi-activity







Sono



Special aquafitness

sound system



Weatherproof and moisture resistant

Designed for swimming pools, water parks

MP3-USB-SD card reader

Easy to use, reinforced carrying handle

Durable lithium battery

2 outputs for underwater speaker



Bluetooth



XEARS AT A CARRANTY



Technical data

Hexa Sono Pro

Hexa Sono Premium D

Hexa Sono Optima D



Weight Power Range

Dimensions (WxDxH)

Autonomy Battery

Warranty References

Special for pool



35 kg max.400 W Standard bluetooth 48 x 30 x 46 cm Up to 12-14hrs Lithium Life P04 2 years Contact us



17 kg max.125 / 250W Standard bluetooth 34,5 x 34,3 x 50,5 cm 4 to 6hrs AC: 220-240Vac 50 / 60Hz 1 year

AC: 220-240Vac 50 / 60Hz F 1 year 6 z310fipS10-250 z



7 kg
max.140 W
Standard bluetooth
43 x 26 x 54 cm
20hrs (on USB and medium volume setting)
PFC - (Lithium optional)
6 months
z283f954455



Underwater materials







Underwater loudspeaker

Synchro Swim Sound is a built-in underwater speaker. Designed to be installed in the most common submarine spotlights of the PAR 56. 50 Watts RMS / 8 ohms. Insulation class: IP69. Resistant to diving up to 3 meters. Weight: 2.5 Kg. Made of plastic, stainless steel. White colour.

Contact us




Quality aquafitness









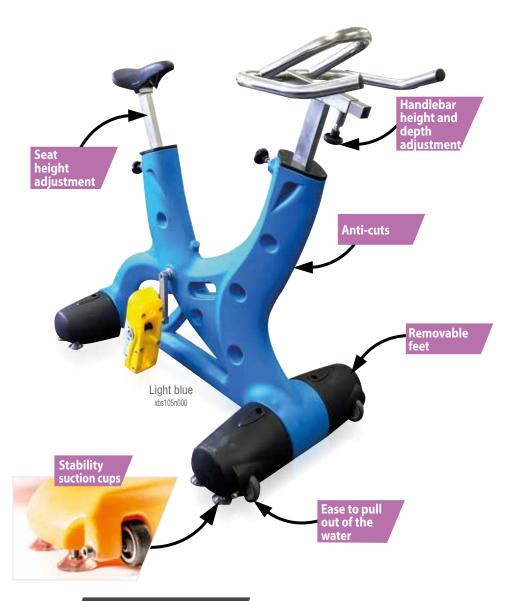

Bike equipment



Comfortable saddle A
Padded foam saddle,
adjustable height.

z645h0003



Suction cups A

Transparent semi-rigid suction cup with integrated stainless steel screws.

z645h0004



Pedal with strap A
Ergonomic shape.
Ideal for all shoe sizes.

z645h0030n000



Strap F
Reinforced PVC pedal strap.

z645h0016



Aqua Bike Shoes F
Size from 36 to 46.

z183httprt (Size: Consult us)

Ideal for aquafitness sessions

Multicolour, innovative design

Ergonomic adjustable posture

Increased stability thanks to specific suction cups

Pedal tested for comfort barefoot use



Technical data

Hexa Bike Optima 100 A

Hexa Bike Optima 200 A



Weight
Material
Depth of use
Dimensions
Suction cup

Wheels Colours Brake References 14 kg
Polyethylene/ stainless steel
120 - 140 cm
115 x 92 x 66 cm
8
2 front
8
Without

8 colours (please specify)



16 kg Polyethylene/ stainless steel 120 - 170 cm 120 x 160 x 66 cm 9 2 front

7 With 7 colours (please specify)



Sport in water

reinvented



SCAN TO WATCH THE VIDEO














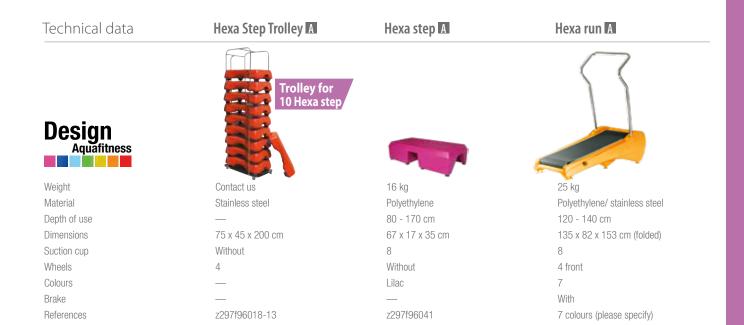







The aquabike


rt version










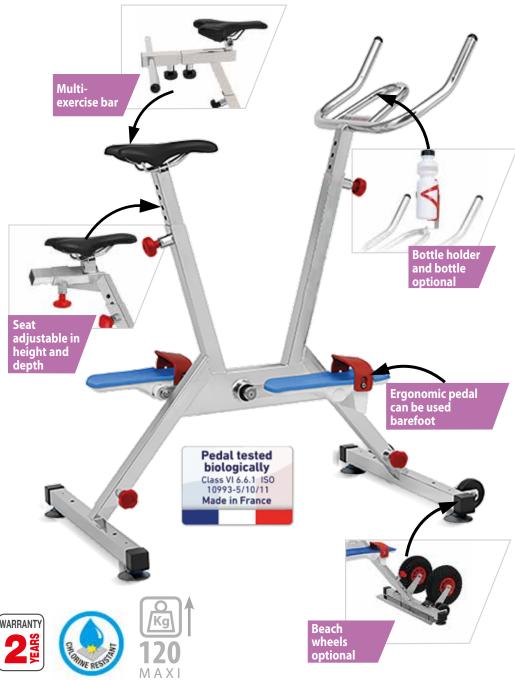







Technical data

Weight

Material

Depth of use

Dimensions

Suction cup

References

Wheels

Brake

Hexa Bike One 100 A

Hexa Bike One 200 A

Hexa Bike One 300 A





15,2 kg Stainless steel 316 L 110 - 150 cm 84 x 60,4 x 120 cm 4 2 front Without z247f0492-006



Stainless steel 316 L 110 - 150 cm 127 x 60,4 x 101 cm 4 2 front Without z247f0492-001



20 kg Stainless steel 316 L 110 - 150 cm 120 x 60,4 x 101 cm 4 2 front Without z247f0492-013



DUNCE - TAHITI

With advertising plate

Technical data

Hexa Bike Resort 100 A

Hexa Bike Resort 200 A

Water descent ramp



Weight
Material
Depth of use
Dimensions
Suction cup
Wheels
Brake
References



127 x 60,4 x 115 4 2 front Without z247f0492-010



25,1 kg Stainless steel 316 L 110 - 150 cm 127 x 60,4 x 101 cm 4 2 front

2 front Without z247f0492-007

Non-contractual photos.



Double inclined plane lets rolling the aquabike and descent it to the water at the place of the ladder into the pool of 1 meter deep.

Made of electro polished stainless steel. Dimensions: 2,10m x 0,88m.

Tailor-made:

according to your pool configuration (contact us).

HEXAGONE - info@myhexagone.com • +33(01)34 34 11 55









Technical data

Hexa Elliptique A

Hexa run Premium A

Hexa jump Premium A



Weight
Material
Depth of Use
Dimensions
Suction cup
Wheels
Brake
References



25,9 kg Stainless steel 316 L 110 - 150 cm 135 x 60,6 x 145 cm 4 2 front Without z247f0492-002



35 kg Stainless steel 316 L 120 - 140 cm 127 x 65 x 139 cm 6 2 front Without z247f0492-005



5 kg Stainless steel 316 L 100 - 140 cm ø 91 cm - H.21 cm 5 Without Without z645haqji01n000



85% muscle

in action





Sustained physical exercise

Ideal for cardio, intense workouts

Can be practiced in all types of pools

Put in motion almost all muscles

A new way of "WATER WALKING"

Technical data

X-Trem bracelets B

X-Trem fins B

Complete X-Trem Kit B



Weight
Material
Depth of use
Dimensions
Colours
References




440 gr
ABS marine quality
No limited
Ø 23 - P.16 cm
Pink or blue
z228hb00001n300
z228hb00001n500



380gr
ABS marine quality
No limited
L.20xP.12xH.21 cm
Pink or blue
z228hb00002n300
z228hb00002n500



440 gr/ 380gr ABS marine quality No limited Ø 23 - P.16 cm/ L.20xP.12xH.21 cm Pink or blue z228hbk0001n300 z228hbk0001n500 (2 bracelets and 2 fins)



Hexagone, a multicolour high-



Hexa Sono Premium D

Hexa Sono Optima D

SONO

Hexa Sono Pro X

Hexa Bike Optima 100 A



Weight
Dimensions
Material
Depth of use
Suction cup
Wheels
Brake
Colours
Page number



17 kg	
34,5 x 34,3 x 50,5 cm	
_	
No	
2	
1	
70	



-	
7 kg	
43 x 26 x 54 cm	
_	
_	
No	
4	
_	
1	
70	



35 kg	
48 x 30	x 46 cm
Alumini	um/ stainless steel
No	
4	
1	
70	



Without

8 colours (please specify)

Technical data





Weight
Dimensions
Material
Depth of use
Suction cup
Wheels
Brake
Colours
Page number



Hexa Bike One 100 A

15,2 kg	
84 x 60,4 x 120 cm	
Stainless steel 316L	
110 - 150 cm	
4	
2 front	
Without	
1	
76	



Hexa Bike One 200 A

10,0119
127 x 60,4 x 101 cm
Stainless steel 316L
110 - 150 cm
4
2 front
Without
1
76



20 kg
120 x 60,4 x 101 cm
Stainless steel 316L
110 - 150 cm
4
2 front
Without
1
76



AQUABIKE / AQUA

18,3 kg
127 x 60,4 x 115 cm
Stainless steel 316L
110 - 150 cm
4
2 front
Without
1
76

performance aquafitness range

AQUABIKE / AQUA COURSES DESIGN Hexa Bike Optima 200 A Hexa jump Design A Hexa run A Hexa multi exercice A Hexa step A Floating mattress Hexa paddle 20 kg 16 kg 16 kg 120 x 160 x 66 cm ø 106 cm x H.22 cm 135 x 82 x 153 cm (unfolded) ø 98 cm x H.170 cm 67 x 17 x 35 cm 220 x 81 x 12 cm Polyethylene/ stainless steel Polyethylene/ stainless steel Polyethylene/ stainless steel Polyethylene/ stainless steel Polyethylene PVC reinforced nylon 120 - 170 cm 80 - 170 cm 120 - 140 cm 160 - 180 cm 80 - 170 cm 9 8 10 2 front Without 4 front Without Without With With 7 colours (please specify) 7 colours (please specify) 7 colours (please specify) 7 colours (please specify) Lilac 75 75





Shower hygiene

Sound
ALARM DEVICE
with infrared sensor before going to the pool.


SPARIEL

A good practice initiati



Return to the locker room

on of showering and drying

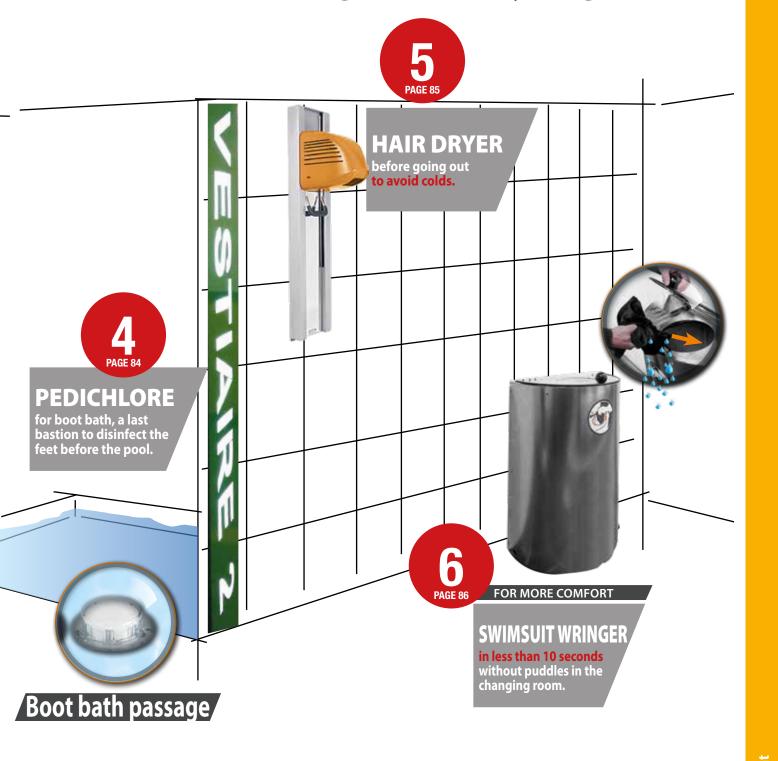



Automatic sound signal

for a mandatory soap shower

MADE IN FRANCE











Passage

Shower hygiene

Shower alert device A

Gel vending machine

Shampoo vending machine

Pedichlore A





Width 20 cm. Height 30 cm. 220V / 24V DC. Speaker 70 db. IP66. Infrared sensor. Detector up to 5m. eks004n000





Styling gel - vending machine. The machine holds up to 250 capsules

E Machine z169hvdgelstkn000fr

E Gel capsule z169hcapshrgl



Shampoo - vending machine. The machine holds up to 250 capsules

E Machine z169hvdshpstkn000fr E Shampoo capsule z169hcapsshmp

Non-contractual photos.



Boot bath superchlorination

Chlorine dosing device for a boot bath.

A In tablet of 250 gr z238f7000014

Chairs / Tables

Baby Hexa chair

Weight: 3,9 kg. Black/grey

Black/red

Changing table **F**

Wall changing table **F**



z195fm212bg

z195fm212br







Dimensions (WxDxH) :40 x 50 x 120 cm.

Horizontal or vertical fixation.

F Horizontal z153f112523 F Vertical z153f113778

z569f5569



Hairdryer



Adjustable height 53 cm

Height adjustable Neptune

Height adjustable or fixed

Wall mounted with flexible hose

Wall mounted anti-vandal



Power: 2000W. Sound level: 70 dB. Colours: Red, blue, white. Dimensions W.xD.xH.): 15 x 34,8 x 38,4 cm.

(3 colours, contact us)

Power: Sound level: 70 dB.

Colours: Yellow, green, red, grey, turquoise blue, blue. Dimensions (W.xD.xH.): 25 x 38 x 121 cm. Height adjustable

Robust ABS

900W. Power: Sound level: 72 dB. Colours: White. Dimensions (W.xD.xH.): 32,2 x 18,2 x 80 cm. z661ftb-c1

Non-contractual photos.



Power: 2100W. Sound level: 70 dB. Colours: White.

Dimensions (W.xD.xH.): 25,5 x 28 x 14 cm. z661f171227



An extra service

THE VIDEO

for your customers

MADE IN FRANCE







Wrings out a swimsuit, eliminates 95% of water in 10 sec

Simple safe use

To easily put a swimsuit in a bag

Suitable for any environment

In stainless steel for perfect hygiene



Technical data

WARRANTY & STATE OF THE PROPERTY OF THE PROPER



Power supply Weight Structure Dimensions (WxDxH) References

Dry 'n' Go XD Wringer B



Motorized with battery 25 kg Stainless steel 54 x 35,5 x 82 cm xdngn000

Dry 'n' Go Wringer 🖪



Motorized 220V 30 kg Stainless steel 54 x 35,5 x 82 cm z184hssd-silver



Your wellness area











Double internal and external security alert

Warn of discomfort in an unsupervised area

Resistant to high temperature up to 110 $^{\circ}$

Protected by international patent

Solution against small impurities in the Spa





Sauna / Spa/ Steam room security

Technical data

LED box with speaker A

Standard wall panic button A

Special Sauna panic button A



Power supply Protection Range Waterproof Autonomy Dimensions References

Prise 220 V IP 65 150 m Yes

Displays the triggered button area

254 x 180 x 90 mm eks001n000

Battery 3,2 V **Ideal** for IP 65 unsupervised 150 m zones Yes

18 month 100 x 65 x 40 mm egs002n001



Battery 3,2 V Resistant IP 65 up to 110°! 150 m

Yes 18 month 100 x 65 x 40 mm Inside button egs004n000

THE SAUNA KIT

NEW!

A eks014n000

Spa cleaning

Technical data



Quick Vac' spa B

Quick Vac' spa turbo XL B

Lineo Spa B



Width Suction power Power Filtration (microns) Filtration capacity Autonomy Minimum water depth Power supply

References

ø 11 cm 9m³/h

120 W 50 or 100 μ 500 gr 1h 15 cm Battery/ Power supply z160hplwrv2/

z160hplwrv2sct

40 cm 15m³/h 250 W

2h 21 cm 12V rechargeable battery z160hplwrxl

50 or 100 μ

About 1 kg of sand

ø 10 cm

40 W 1h xlineospa

Disabled access for Spa

Technical data



Autonomous fixed Unikart F

Motorized Unifix XD



heiaht

Use Max lifting load Weight Power supply Dimensions (WxDxH) Trolley/ Seat System

Seat course

References

SR/Smith. H.2.70 m 136 Autonomous

Up to 136 kg 542 kg 24V battery 249 x 72 x 168 cm

Aluminum/ stainless steel/ rotomolded Motorized 138 cm

Z797f275-0000eu

SR/Smith. 136

Autonomous Up to 136 kg **AUTONOMOUS!** 127 kg 24V battery

171 x 50 x 234 cm Aluminium/ Galvanized steel

Motorized 170,5 cm z797f310-0000ceu



Up to 150 kg 60 kg 2 batteries 132 x 30 x 152,5 cm Galvanized steel/ hammock or seat Motorized 140 cm

Attachment plate z190fpv01-3 - Coring z190fpv01-2 Gallows alone





Storage studied for your swimming pool

Shelves

Rack with 4 shelves

Rack with 3 shelves

Shelving unit for mats storage

Shelving unit for noodles

Shelving unit with closing box



Dim. (WxDxH): 150x50x190 cm z165fms1500/500



Dim. (WxDxH) : 120x50x150 cm z354F9344



Dim. (WxDxH) : 140x60x225 cm z165fms(pr)



Dim. (WxDxH): 135x57x150 cm z165fndl1350



Dim. (WxDxH) : 135x57x150 cm z165fndl1350dr

Benches

Simple bench

Long simple bench **E**

Double side bench

Simple bench with hanger **F**

Double bench with hanger **E**



Dim. (DxH) : 35x49 cm W.90cm z165fb900/350 W.150cm z165fb1500/350



Dim. (DxH): 45x49 cm W.200cm z165fb2000/450 W.300cm z165fb3000/450



Dim. (DxH): 75x49 cm W.150cm z165fb1500/750 W.200cm z165fb2000/750 Non-contractual photos.



Dim. (DxH): 45x170 cm W.100cm z165fbh1000/450 W.150cm z165fbh1500/450



Dim. (WxDxH): 150x71x170 cm

z165fbh1500/710








Yellow















Boxes

Aquagym rack **F**

Box for small objects **F**

Aquagym storage unit

Shelving aquagym **F**

Aquagym box cabinet **F**



Dim. (WxDxH): 72x65x105 cm z165fndl(mini)



Dim. (WxDxH): 120x70x90 cm z165fts(s) (with cover) z165fts(s) (without cover)



Dim. (WxDxH): 144x69x111 cm z165ft(s)ndl (with cover) z165ft(s)ndl (without cover)



Dim. (WxD): 176x76 cm H.192 cm z165fmega12notoprack H.227 cm z165fmega12toprack



Dim. (WxDxH): 126x76x156 cm Z165ft(I) (with cover) Z165ft(I) (without cover)

Boxes

Robust box **F**



Dim. (WxDxH): 100x80x70 cm

z255fpe-rts2

Multi-objects box



Dim. (WxDxH): 100x65x95 cm

z255fpe-rts1

Bins & barriers

Frog Arnold bin 🖪



Diameter 0,70 cm. Height 0,80 cm. Resin.

z371ffegr-002

Non-contractual photos.

Dolphin Willy bin 🖪




Diameter 0,70 cm. Height 0,80 cm. Resin. z371ffegr-001

Plastic barriers A




Yellow Red Green Blue Weight 9,2 kg. Recyclable100%. 198x55,5x102 cm (weight foot). (5 colours contact us)






Tested and certified at 1500 kg





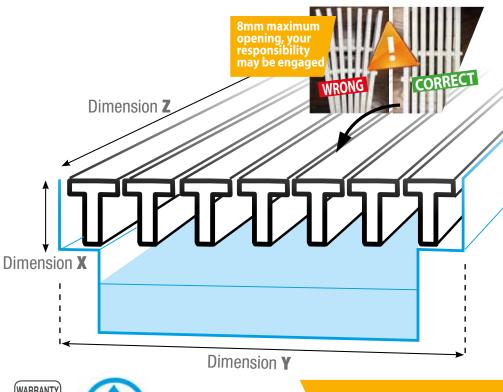





In 16 colours*

Non-contractual photos.

*Contact us



Different height, width, length and colours

Adapts to the shapes and features of your pool

Ultra-resistant 1500 Kg/m²

Specific design with anti-slip grooves

5 years warranty

Perpendicular gutter grates **D**



Height (x)	Rigid (y)	Curvable (y)
22 mm	175 to 295 mm	150 to 295 mm
25 mm	175 to 400 mm	150 to 330 mm
30 mm	175 to 500 mm	150 to 330 mm
35 mm	175 to 900 mm	150 to 330 mm
Length (z)	in standard sections of 2.5 m	in standard sections of 1 m

Parallel gutter grates **D**



Height (x)	Width (y)	Length (z)
25 mm in I	150 to 400 mm	elements of 1 m
25 mm PVC	standard 245 mm	elements 250 mm
25 mm PP	standard 245 mm	elements 500 mm
25 mm	182, 254, 330 mm	elements 333 mm
35 mm in T	150 to 400 mm	elements of 1 m

Curvable gutter grates **D**



Height (x)	Width (y)	Length (z)
25 mm	180, 200, 205, 250,	segments of 1 m
	300 mm	
35 mm	195, 245, 295, 335 mm	segments of 1 m

Chlorine regulation box with very readable digits

Regulation


filter holder + filter









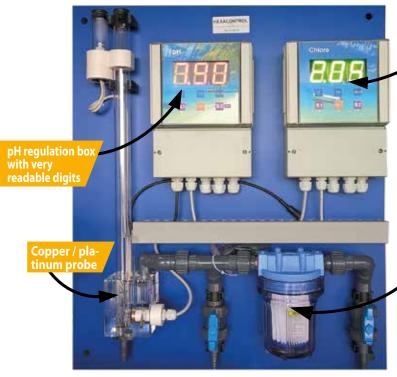

More than 3000 users

Reliable measurements thanks to a special analysis chamber

Easy to take samples

Data transmission in 4-20mA

XXL display of chlorine and pH

Regulation

Amperometric regulation A



Ideal for dark technical rooms. Well readable large display. Chlorine and pH box. Probe block with stabilized flow. Copper/ platinum chlorine and universal pH probes integrated. Flow detector. Integrated sample taking (Installation not included.)

More than 3000 users!

- A Complete Ch / pH regulation z243hzr0012n001
- A Complete Ch regulation z243hzr0010n000
- A Complete pH regulation z243hzr0002n000

Probes A



- A Ch probe without wire z243f5636ccp
- A Ch probe with wire z243f963sa
- A Universal pH probe z348f00404531-20.1

Non-contractual photos.

Dosing tank D



The polyethylene dosing tank allows you to safely store from 50 to 250 liters of liquid products. The solution will be injected by a dosing pump.

D 50 liters tank
 D 100 liters tank
 D 250 liters tank
 z218f46562r
 z218f01315

Reliable and accurate

analysis

Photometers

Photometer PC 03

Photometer PC 09

Municipal testing kit

Sanitation diary



It provides numerical results for 3 key parameters: Chlorine, pH and Stabilizer (Cyanuric Acid). Waterproof with a large LCD backlit display. z276fsph003d



It allows the analysis of 9 tests (Chlorine, pH, CYA, TA, TAC, TH, OZ, CU, BR, FE). Downloadable and shareable data via Bluetooth or USB SMART. z276fsp709e

Colorimeter, comparator, disks, 6 functions. Square test tubes, accessories. Chlorine, pH, TAC, TH Calcium and Stabilizer (Cyanuric Acid) analysis. z276fsp129c



The sanitation diary for public or residential swimming pools. Each page allows you to record your observations and analysis for all 7 days of the week. z294f8400004

Round test tube A



10 ml. In glass. Set of 5. A Large z276fpt595 A Wide z276fpt555

Square test tube A



10 ml. In glass. Set of 5.

z276fpt521/5

Tablets

DPD 1

DPD 3 250 hox. DPD 4

250 box. DPD stabiliser

DPD Phenol red 250 hox.

A Black for photometer

z276fap011 A Black for photometer z276fap031/1

A Black for photometer

z276fap041 C 100 box. z276fap087

A Black for photometer z276fap130

A Green manual 2276fat010

A Green manual z276fat030

A Green manual z276fat040

C 250 box.

2276fap087/250 A Green manual z276fat130

Thermometers

Black & Decker thermometer A





Electronic thermometer **F**



Electronic infrared thermometer. z094ftld100-xj



Floating thermometer. 7303f2381



Anchor thermometer. 7303f5021



Electronic thermometer with probe. 7368fhi98509n

Pumps

Dosing pump from 0.1 to 200L / H

Normblock Multi Pump

Badu Block Multi Pump

Ressort Pump

Other models, contact us



Designed for injecting liquid products such as pH-regulating agent. It can be programmed to regulate chlorine and pH.

F 5 liters/h z237fakl603nhhuuuu F 10 liters/h z237fakl800nhh0000 F 20 liters/h z237fakl803nhh0000



Innovative circulation and filtration pump for public pools and aqua parks. Horizontal entirely plastic block.

Consult us



Circulation and filtration pump for public

pools and aqua parks. Non-self-priming, single-stage, volute casing in vertical monobloc design. The low speed of the motor guarantees reduced wear. Consult us

Non-contractual photos.




Circulation pump for swimming pools of hotels and campsites, or special pools. Monobloc with integrated tank. The motor shaft has no contact with water to ensure complete electrical separation. Consult us


3 kg of salt = 1 kg of 100% chlorine







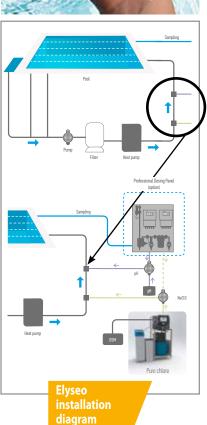

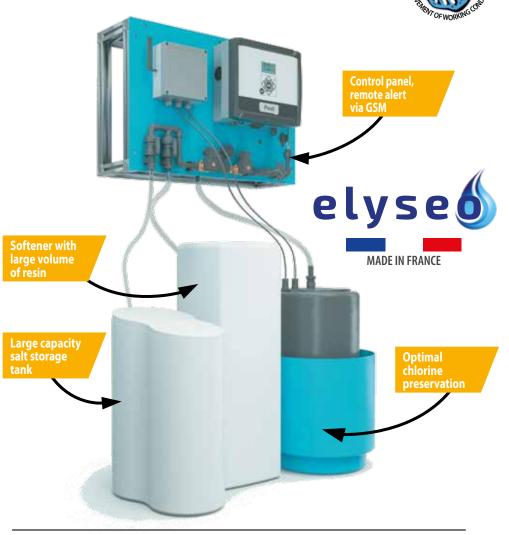

Reduced operating cost

No more chlorine manipulation

No more deterioration of chlorine quality

Respect the environment

For a pool from 200 m³



For pools up to Electrodes of production Chlorine production capacity Salt consumption (1 kg produced chlorine)

References
Installation not included



200 m³ 2 3,4 kg/day 3 kg z565fpure17p00140



500 m³ 4 6,7 kg/day 3 kg z565fpure17p00280



1000 m³ 8 13,4 kg/day 3 kg z565fpure17p00560



Storage and protection

Other models, contact us

Bottle tray **F**

Tray for cans and drums **F**

Motorized transfer pump

Manual transfer pump

114

Dimensions : 63,5 x 41,5 x 20,5 cm. Volume 40 liters. z182f042.574.44



Dimensions : 120 x 64 x 15 cm. Volume 100 liters. z182f000.695.85



Suitable for cans of 20 to 200 liters. z206f31441010 alone z206f31443010 complete



Suitable for cans of 40 to 110 liters.

Tigergrip overshoes

Contact us

Mask and cartridge



Gas mask alone. z278f1710394



Type B cartridge. z278f1785030



PVC. One size.

z246f9510500001

PVC apron **A**



Chemical resistant gloves F

PVC. One size.

z080f050230384 Non-contractual photos.



Safety overshoes. Yellow z183httprt-34-36-s Brown z183httprt-37-40-m

Red z183httprt-41-44-l Green z183httprt-45+-xl



Reels

Simple mobile reel system





Manual or motorized

For swimming pool up to 8 x 50 m

Anodized aluminum tube with a diameter of 130 mm

On casters		
Max. strip size	Manual	Motorized 120Nm*
5 x 25 m	z074fv-enca01300	z074fv-enca01400
6,25 x 25 m	z074fv-enca01301	z074fv-enca01402
8 x 25 m (manual)	z074fv-enca01302	z074fv-enca01404

*In 250 Nm, contact us

Double mobile reel system






Manual or motorized

For swimming pool up to 16 x 25 m

Two anodized aluminum tubes with a diameter of 130 mm

On caster

Officasters				
Max. strip size	Manual	Motorized 24V		
5 x 25 m	z074fv-enca02300	z074fv-enca02400		
6,25 x 25 m	z074fv-enca02301	z074fv-enca02401		
8 x 25 m (manual)	z074fv-enca02302	z074fv-enca02402		

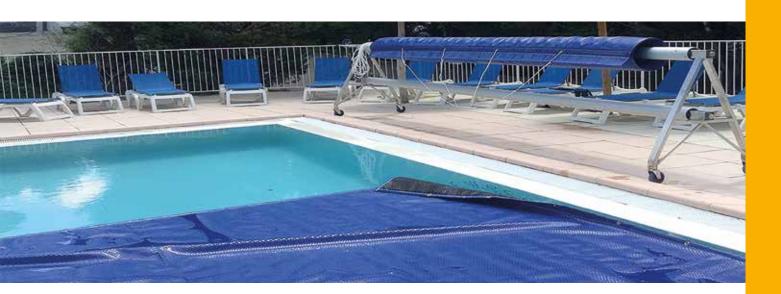

Covers



Bubble eco cover A

400 gr/M²

For swimming pools up to 20m.

Supple bubbles.

Translucent.

z238fspecial



Foam cover Optima A

5 mr

For swimming pools up to 50m.

Closed cell foam.

Blue color.

z074fisodeleco5



Foam cover Premium A

7 mr

For swimming pools up to 50m.

Closed cell foam.

Blue color.

z074fisodellux7



Winter cover A

550 gr/M²

For swimming pools up to 14m.

In polyethylene.

Green color.

Contact us

Heat, ventilate, dehumidify












In summer, your shelter is not an oven, the heater provides ventilation with a temperate air.





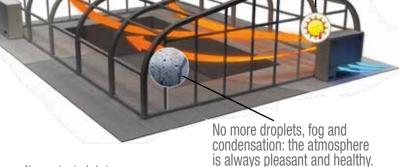

Go from 0 ° to 25 ° in less than 15 minutes with your heater.

Heats in winter, ventilates in summer


Dehumidifies and fights droplets

Swimming possible all year round, assured comfort

Regulated temperature with minimum energy cost

Fast delivery and commissioning





Technical data

Energy
Body
Winter consumption
Mid-season consumption
Dimensions W. x D. x H.)
References
installation not included

Hexa Sun 🖪

Fuel, natural gas or propane
Stainless steel with epoxy paint
2,8L/h of fuel (20h of autonomy)
1,5L/h of fuel (40h of autonomy)
135 x 55 x 137 cm
Fuel - natural gas - Propane
Contact us

Hexagone








More than 55 countries in the world



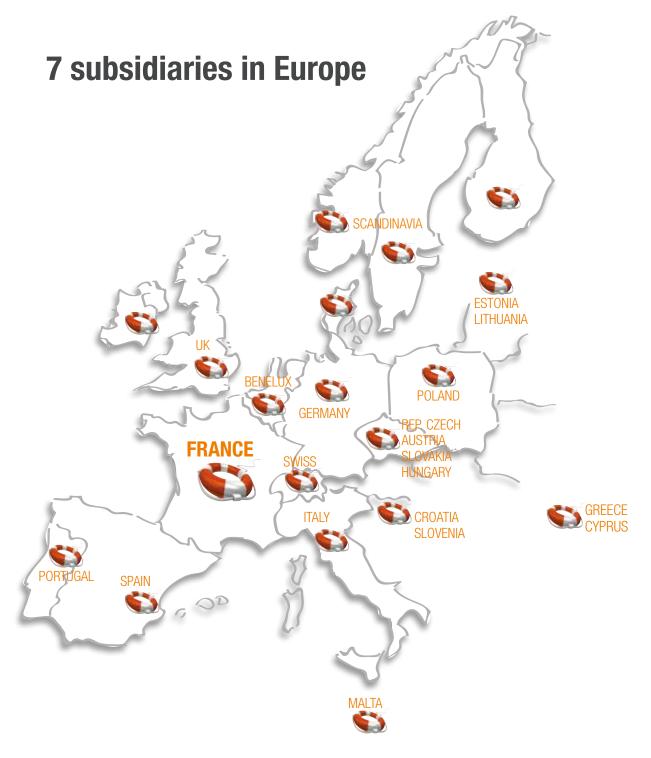



OLIVER GUMBRECHT Germany Manager



FABRIZIO FERRARI Italy Manager



MICHEL VAN DEURZEN Benelux Manager



JEAN DILIBERTOFrankrijk
Manager



BRAD ATTWOOD UK Manager



NORBERT MORI Switzerland Manager



JOSUE GARCIA Spain Manager

Hexagone



GROUP OF 10 M€

Localisation

- Argenteuil, 6500m²
- 9 after sales service points in France
- 7 subsidiaries with office and storage (Germany, Italy, Spain, the UK, Benelux, Denmark, Switzerland)
- 55 distributors worldwide





R&D

- 6 dedicated engineers: mechanics, electronics, mechatronics, vehicle architecture
- Computer-assisted creation with Solid Edge and SpaceClaim
- 18 product developments in 24 months
- 3D printing for prototyping



MADE IN FRANCE

Production

- 5S method throughout the plant, 600 tests per day
- Stainless steel workshop, selection of raw materials, section of tubes, weld control and quality of electropolishing
- Motors and pumps workshop with electrical, hydraulic and sealing tests
- Electronic workshop with severe durability tests

2 M€ of stock

Logistics

- Import of more than 1.6 million in 2018
- Contracts with Fedex, DPD, Geodis, Dachser for transportation to ship within 24 hours
- Shipping by sea containers and air freight
- CACES license of our logisticians
- 5000m² of storage



group

70% OF PUBLIC POOLS

Commercial

- World References (Rio 2016 and London 2012 Games, World Championship in Budapest 2017, Hangzhou 2018 and Gwangju 2019)
- Number 1 in France, 35% of public swimming pools in Europe and 15% in the world
- Dedicated export service
- Integrated communication support (catalog, website, data sheets, mobile app)

After sales service

SERVICE ON

- Hot line technical assistance from 7:30 to 18:00, 5 d / 7
- Factory workshop with test pool
- 11 traveling technicians
- Storage of robots in winter
- Training workshops for technicians and distributors, level 1 to 3



ANNUAL OR SUMMER SEASON RENTAL

Funding

- Lease (self-financing) contract of our products
- Electronic invoicing
- Ranking of Hexagone at the top in the banks and Institut Plimsoll
- Management under SAP software
- Revenue increased by 40% in 3 years





- Support for apprentices within the company
- Professional tax dedicated to a school for the disabled

RESPONSI

- Donor of an association the shoethat grows.org
- Recycling of our equipment
- Regular replacement of our vehicles to lower the carbon footprint
- Commitment to the UNO Code of Professional Ethics

ACCOUNT OPENING



Please complete this form and return it with the following documents: a Kbis extract of less than 3 months, a Bank Statement, letterhead with SIRET number, our GSC signed with name, first name and function of the signatory and stamp of the company with SIRET number, bear the words «read and approved»

GENERAL INFORMATION			
Company name*:			
LEI (Legal Entity Identifier)*		VAT number*	
Address*:			
Post code*:	City*:	Country* :	
Tel*:	Fax*:	General email*:	
Email for order acknowledgments	* •		
Delivery address (if different):			
Post code :	City:	Country :	
Tel for delivery*:		Fax:	
Specify your closing days*:		Reception h	ours* :
Delivery constraints:			
*essential information to open the o	account		
MANAGEMENT CONTACT	**		
Mrs./Ms. 🖵		Mr. □	
Surname :		First name :	
Position:		E-mail :	
Fax:	Cell phone number*:	Tel :	
PROCUREMENT DEPARTM	MENT CONTACT*		
Mrs./Ms. 🖵		Mr. □	
Surname :		First name :	
Position:		E-mail :	
Fax:	Cell phone number*:	Tel :	
ACCOUNTING DEPARTME	ENT CONTACT*		
Mrs./Ms. □		Mr. □	
Surname :		First name :	
Position :		E-mail :	
Fax:	Cell phone number* :	Tel :	
Payment terms and conditions: First order: full payment ahead of the order. Next Any order placed in Hexagone Manufacture i customer acknowledges in particular that the g the right to suspend or cancel any account w	s (send us your purchase conditions).	ally accepts the general conditions of ure until full payment of their price. The onditions of sale of Hexagone Manufac	company Hexagone Manufacture reserves ture or the defined method of payment.
Name, surname, position and sig Mark «read and approved»	nature.	Date :	Company stamp

defects. The Customer shall supply any documentation or elements which demonstrate the extent of observed defects. No complaints can be made by the Customer more than fifteen (15) days after the delivery of the goods. Indications of performance, speed, consumption power, weight etc. are only given on an indicative basis and without any commitments or guarantees on our side, any inaccuracies may in no case give rise to the termination of an order or a request for nensation

II.2. Our products are aimed at professionals, and as such should only be handled by individuals who have received free training on the product offered to the Customer by Hexagone Manufacture S.A.S. or its accredited distributor. Our pool cleaners are guaranteed against any material and construction defects for a period of twenty-four (24) months from the delivery date and for up to 1200 hours of use. Our devices other than pool cleaners are guaranteed for 12 months from the delivery date. Our warranty only applies to products which have become the property of the Customer. II.3. We shall no longer be bound by our warranty obligation in cases where the warranty terms on some aspects of our products are breached without our express agreement.

II.4. Our warranty is limited to the replacement or repair of parts which we deem defective, excluding any other damages.

II.5. Hexagone Manufacture S.A.S. accepts no responsibility in cases of operating losses, loss of time or of any other indirect loss caused by its goods. The Customer must seek a substitute to defective equipment. Furthermore, the client shall comment on the usage scope of the equipment in case of defects observed on the material by themselves or in the place of use or on their mode of use.

II.6. All standard new or exchanged spare parts are guaranteed for 6 months for a maximum 500 hours of use

II.7. Warranty on consumable parts. Filters, brushes, crawlers, belts, cables, trolley tyres are considered consumable parts, whose warranty is limited to 6 months and a maximum of 300 hours of use.

II.8. Exclusions to warranty in the following cases:

II.8. Exclusions to warranty in the following cases:
damage and wearing resulting from a special, abnormal or otherwise application or assembly, carried out by the Customer
or a third party without prior and written agreement from Hexagone Manufacture S.A.S.; use of our goods in conditions
of use or performance which do not conform with the technical specifications of Hexagone Manufacture S.A.S.,
and more generally inappropriate or clumsy usage; damage or accident caused by the intervention of an employee of
the Customer not trained to use the product or a company not accredited by Hexagone Manufacture S.A.S.; defects and/
or damage to goods following maintenance not carried out in line with Hexagone Manufacture S.A.S. recommendations
or failure to maintain, or irregular storage and/or conservation conditions by the Customer; whereby the Customer fails
to notify Hexagone Manufacture S.A.S. in writing (specifically by fay or again from the moment they observe the defect to native to that the content of the Manufacture S.A.S.; breakdown as a result of incorrect electrical installation, current fluctuations, poor connections or even the failure to observe by the Customer the electrical standards in force in the country of use; damage caused by external accidents: fall, transportation, fire, flood, melting, blackout, short-circuit, as well as accidents such as shocks, power-cuts, the introduction of foreign objects and/or liquids (acid, cleaning product, chlorine, water, tropical rainfall, etc...); where a third party or the Customer themselves has opened the electric control box and/or the engine or pump or gyroscope without our written agreement. The anti-corrosion warranty does not apply to sulphuric water or that without daily cleaning with stainless steel clear water.

As a result, Hexagone Manufacture S.A.S. shall not be held responsible for material damage or accidents suffered by individuals as a result of one of the cases listed above.

Shipping and returns costs incurred by the application of the warranty shall be borne by the Customer. We accept no responsibility for damage caused to property due to our products following an equipment failure or a construction defect auipment sold.

PLEASE NOTE

GENERAL CONDITIONS OF SALE HEXAGONE MANUFACTURE S.A.S.

The length of warranty for the defective equipment or part under guarantee shall be extended by a duration equal to the time spent in our servicing department where this is longer than a week. Outside of warranty repairs are subject to an estimated charge of 150 Euros less tax. This amount is only due if the Customer turns down repairs. Any parts to an estimated charge of 190 clouds less tax. This anitourit is only due if the Customer times down repairs, any paris delivered by Hexagone Manufacture S.A.S. shall be invoiced at the moment of delivery, in cases of warranty claims, said defective piece shall be returned to Hexagone Manufacture S.A.S. within a month maximum for assessment and work. Beyond this time, we can no longer accept it. Hexagone Manufacture S.A.S. shall in no case be held solely responsible for the cleanliness of pools. It is therefore recommended that the Customer always have access to a substitute for a defective machine. If a technician from Hexagone Manufacture S.A.S. should establish that the breakdown is not covered by warranty, the technician may invoice for the uncovered problem in line with to the current tariff. Following testing of equipment under guarantee whose defect has not been found during servicing, the Customer shall be billed for the time spent looking for the defect.

Mode of intervention: you can contact the technical service by calling 0134341155 or any other Hexagone Manufacture S.A.S. agency. For work done under warranty, equipment or parts may only be sent to the following address: Hexagone Manufacture S.A.S., 34 rue du Perouzet,95100 Argenteuil, France, quality service. To request work under warranty, the Customer must fill in a sheet authorising the work, including the device's serial number, the in-service date, the number of the replacement part, as well as observations regarding the defect observed.

Any technical documents sent to our clients remain the exclusive property of Hexagone Manufacture S.A.S., the sole Any extension occurrents sent to our clients remain the exactive property in reading the maintain the Section in the following of the size holder of intellectual property rights over these documents, and must be returned to us upon request. In accordance with laws currently in force, it is forbidden for customers to fully or partly reproduce our technical and commercial documents and to make any use of them which is liable to violate the industrial or intellectual property rights of our company. The shall undertake not to divulge these to any third party.

We reserve the right to ask for removal of our products from sale on a website which does not respect our commercial policy in terms of price and trading conditions.

V. TERMINATION CLAUSE

In cases where any one of the Customer obligations is not respected by the latter, sale may be terminated fully within rights, and goods returned to Hexagone Manufacture S.A.S. as it sees fit, without prejudice to any damages or interests which Hexagone Manufacture S.A.S. may assert to the Customer, within 48 hours after a formal notice which goes unanswered. In this case, Hexagone Manufacture S.A.S. is within its rights to seek a fixed rate of compensation of 15% istomer, as well as default interests and any legal fees incurred.

VI. PROFESSIONAL WASTE ELECTRICAL AND ELECTRONIC EQUIPMENT (EEE)

In accordance with the provisions in articles R543-195 and R543-196 of the Environment Code modified by Decree n°2014-928 of the 19 August 2014, our Company has hereby joined the accredited eco-body LOXY at Parc d'Activité du Vert Galant 17 rue Antoine Balard - 95310 Saint-Ouen l'Aumône (RCS Pontoise 482.644.952) with a view to ensuring the and electronic equipment.

VII. APPLICABLE LAW - ATTRIBUTION OF COMPETENCE

This contract is governed by French law. The application of the Vienna Convention on Contracts for the International Sale of Goods is specifically excluded. Any dispute relating to the forming, implementation or termination of contractual obligations between the parties which does not lead to amicable settlement shall be referred to the French courts. In case of any dispute with professionals and/or merchants, this shall be referred to the TRIBUNAL OF COMMERCE OF PONTOISE within whose area of jurisdiction Hexagone Manufacture S.A.S.'s headquarters is situated, whatever the conditions of sale and mode of payment accepted may be, even in cases of incidental claims, warranty appeal or of more than one respondent, Hexagone Manufacture S.A.S. reserves the right to refer the case to the competent local jurisdiction where r's headquarters are situated.

VIII. PARTIAL NULLITY

If one of the clauses or provisions of these GCS should be annulled or declared void by a definitive court ruling, such nullity or void nature shall be without prejudice to the other clauses and provisions, which shall continue to apply.

I.1. APPLICATION AND ENFORCEABILITY OF THESE GENERAL CONDITIONS

These general conditions of sale (hereafter, "GCS") apply systematically to every buyer (hereafter "the Customer") with the current Hexagone Manufacture S.A.S. tariff, allowing him/her to place an order. As a result, the fact of placing an order Implies full acceptance without reservation by the Customer of the GCS. No specific condition may except in cases of formal and written acceptance from Hexagone Manufacture S.A.S., prevail over the GCS. In the absence of express

or normal and written acceptance from nexagone wallulacture S.A.S., prevail over the GCS. If the absence of express acceptance, no contrary condition may be raised in objection with Hexagone Manufacture S.A.S. by the Customer, regardless of the time when it may have been brought to its knowledge.

The fact that Hexagone Manufacture S.A.S. does not avail itself at any given moment of any one of these GCS may not be interpreted as a waiver of the right to avail itself of this at a later date. These GCS prevail over any Customer general acceptance. is. These GCS apply to all countries.

I.2. ORDER:

Par commande, il faut entendre tout ordre portant sur nos produits figurant sur nos tarifs, et accepté par Hexagone Manufacture S.A.S.. Les offres faites par nos agents ou teléphoniquement ne constituent un engagement gone Manufacture S.A.S.. Les offres faites par nos agents ou teléphoniquement ne constituent un engagement de notre part qu'après notre confirmation écrite. Le Client sera réputé être d'accord avec le contenu de notre confir-mation si, dans les huit (8) jours, il ne nous a pas fait part dans un écrit Recommandé avec Accusé de Réception de ses observations éventuelles. A défaut de toute observation écrite, la commande aura un caractère irrévocable. Le bénéfice de la commande est personnel au Client et ne peut être cédé sans l'accord d'Hexagone Manufacture S.A.S.. I.3. ORDER FULFILMENTS:

We reserve the right to make any modifications or improvements we deem necessary to our products at any moment, without this serving as grounds for a Customer to cancel an order, or requiring us to make any modifications or improvements

I.4. CANCELLATION OF ORDERS

No order can be cancelled by our Customers without our prior and express agreement.
In any case where Hexagone Manufacture S.A.S. should accept the cancellation of an order, any deposit paid by the r shall be retained by us in compensation.

are carried out by freight forwarders either directly to the Customer or via a carrier

Delivery times as well as transportation times are determined on a case-by-case basis and are entirely indicative and without guarantee. Unless there is a contrary agreement, they shall never constitute a commitment on our side. Any delay to delivery shall not constitute grounds to terminate the order, or grounds for refunds, damages or interests, deductions, compensation, cancellation of the current order or the refusal of goods, as well as any kind of indemnity. If in cases of force majeure, and especially: fire, flood, discontinuation of product, machinery breakdown, war, riots, requisition, required reduction of imports, accident or manufacturing delay at our suppliers, delay to transportation of goods, as well as in cases of the occurrence of any event beyond our control which prevents the execution of the contract under normal conditions, whereby manufacture and/or delivery have been prevented or delayed, then our contractual obligations shall be suspended for as long as the case of force majeure exists, without any responsibility borne by Hexagone Manufacture S.A.S., even if a firm timescale has been confirmed. If the case of force majeure should continue for longer than forty-five (45) days, the more diligent party may, if it wishes, cancel the order affected by the case of force majeure without either of the parties laying claim to the payment of damagesand interests.

1.5.2. TRANSFER OF RISKS

The transfer to the Customer of risks of loss, theft or damage of goods sold, as well as the damages these may cause, shall be effective from the moment the courier takes possession of the order. The Customer shall, as a result, take out insurance covering these risks pertaining to the reception of goods for delivery by the courier.

Unless otherwise stipulated, delivery shall be made by our accredited couriers with shipping costsbilled to the Customer Unless orderwise supulated, delivery shall be made by our accretioned couriers with shipping cossistilled to the customer in addition to the price paid for the goods. Hexagone Manufacture S.A.S. cannot be held responsible for damage which occurs during transportation or unloading. Goods shall always travel at the Customer's risk, even in case of returns or despatches sent carriage paid or C.O.D. The Customer shall be responsible for checking that the goods are in good condition at the moment of delivery. They shall also check the quality, quantity and reference of goods, as well as that they match the original order. The Customer shall relay, where necessary, any concerns to the courier concerning missing and/or damaged goods, the type of damage and the extent thereof. These concerns must be communicated to the ourier with acknowledgement of receipt within three (3) days not by the Customer by extra-judicial act or registered letter with acknowledgement of receipt within three (3) days, not including bank holidays, of the reception of said goods (article L133-3 of the French Code of commerce); one copy shall also be addressed to Hexagone Manufacture S.A.S..

All recourse shall be sought from the carrie-Mine, Where, in accordance with reasonable commercial standards, Hexagone Manufacture S.A.S. carries out additional transportation operations, such as loading, wrapping, securing, taking out an insurance policy, customs formalities etc. it shall only act as a representative of the consignee who retains their responsibility for the cost, risks and perils of such operations.

I.6. COMPLAINTS AND RETURN OF GOODS

Without prejudice to claims made against the carrier by the Customer, such as those included in article 1.5.3., in the case of visible defects or missing products, any complaint, whatever its nature, relating to delivered products, shall only be accepted by Hexagone Manufacture S.A.S. if it is made in writing, by registered letter with acknowledgement of receipt, within fifteen (15) days following the delivery date.

Would intern (15) days following the deliverly date.

No goods may be returned without our express agreement and goods may only be returned if fit for resale. The Customer shall allow Hexagone Manufacture S.A.S. to verify any defects to allow for these to be remedied. He/she shall abstain from intervening themselves or from seeking intervention from a third party. The cost and risk or ferturns shall be borne by the Customer at all times. Any goods returned without our agreement shall be made available to the Customer and shall not lead to the establishment of an asset. Justified returns shall be subject to a replacement of the product as deemed most appropriate by Hexagone Manufacture S.A.S. in light of the Customer's needs or, where it is impossible for us to do so, a credit shall be made to the Customer after we have verified the quality of the returned machine, which shall exclude any compensation or damages and interests, deduction of the price of usable accessories, missing equipment and the cost of returning it to good working order. In cases where Hexagone Manufacture S.A.S. accepts the return of goods in conformity with the initial Customer requirements, the purchase price of said goods shall be paid to the Customer um of 75% of the billed value.

I.7. PRICE AND PAYMENT

1.7.1. Prices, information and technical characteristics which can be found in our catalogues, tariffs, prospectus, technical specifications or other documents are indicative and cannot be deemed firm offers. These documents have no binding nature and can be modified at any moment and without prior notice. Our prices are expressed in Euros, Any taxes duties or other contributions to be paid in accordance with French legislation and regulations, or those of an importing or transit country shall be borne by the Customer.

1.7.2. Our materials are always billed at the current tariff at the moment when the order is confirmed by Hexagone Manufacture S.A.S., and are less tax from the moment they depart our headquarters in Argenteuil, carriage and packaging not included. 1.7.3. A fixed sum of 21 € less tax on charges for all invoices of under 80 € less tax.1.7.4. Our invoices are payable upon reception unless a different payment schedule is indicated on the invoice. Only the

in the cashing of a paper instrument or cheque or the reception of a bank transfer shall be considered as valid payment under these GCS. In cases of payment by bills of exchange, the Customer is required to return the accepted paper instruments presented to them within a maximum of seven (7) days. Any amount including tax not paid within the allotted time shall give rise to a payment by the Customer of delay penalties fixed at 3% per month's delay, as well as a fixed rate of compensation to cover losses to our Company of a total of FORTY (40) EUROS. If the recovery costs are greater than the amount of said compensation, our Company shall then seek, with supporting documents, additional compensation (articles L.441-6 et D.441-5 of the code of commerce).

1.7.5. Recourse to our warranty obligation or any other demand of any kind that the Customer may make shall not allow him/her to in any case or under any pretext retain or delay payments owed to us, it is also expressly required that any delay or failure to pay should lead to the ceasing of recourse to our warranty and agreements.

1.7.6. Our sales are made fully and without exception at our Argenteuil headquarters, unless otherwise specified. Acceptance of our bills of exchange or payment by any other means shall not constitute either a renewal of or a derogation from this clause. 1.7.7. Failure to accept our drafts or payment default at the expiry of a bill of exchange or an invoice, and whatever the mode of payment or in cases of cessation of activity or cessation of funds, shall lead to the forfeiture of the term, requiring that all debts to us, including those not yet expired, be paid immediately. It shall also lead to the suspension or resolution of tenders, contracts and orders in progress, without possibility for the Customer to argue an unjustified refusal of sale, or claim any kind of compensation.

1.8. TRANSFER OF PROPERTY - OWNERSHIP RESERVE CLAUSE

Hexagone Manufacture S.A.S. reserves ownership of goods sold until effective payment of the full price for the main goods and accessories, even in cases of granting of payment terms. The Customer may in no case resell, pledge or grant a guarantee on the good delivered and not fully paid for. Payment default on any deadlines may lead to goods being reclaimed. Where reclaims are made, deposits already paid shall be retained by Hexagone Manufacture S.A.S. in compensation



2019-2020

100% PRO







Your everyday partner

www.myhexagone.com











Our flash code: watching products videos



